

**80637
03-2025****Complementary documentation****HIX SAFETY NOTE**

DESCRIZIONE

HIX (IMPACT) series Melt pressure transmitters are built with MEMS (SOI) technology.

The transmitters are designed and built in conformity to TR CU 012/2011 standard and to European standards EN IEC 60079-0:2018, EN 60079-11:2012

Protection mode: group II, category 0

GAS protection mode: Ex ia IIC T6, T5, T4 Ga (Ambient Temperature: -20°C...+60°C / +75°C / +85°C)

DUST protection mode: Ex ia IIIC T₂₀₀85°C, T₂₀₀100°C, T₂₀₀110°C Da IP65 (Ambient Temperature: -20°C...+60°C / +75°C / +85°C)

ELECTRICAL DATA

Maximum voltage Ui:	30 V
Maximum current Ii:	100 mA
Maximum power Pi:	0,75 W
Maximum capacity Ci:	10 nF
Maximum inductance Li:	17 µH
Ambient temperature:	-20...+60 °C / +75 °C / +85 °C

MARKING



0722

0 Ex ia IIC T6, T5, T4 Ga

Ex ia IIIC T₂₀₀85°C, T₂₀₀100°C, T₂₀₀110°C Da IP65

0722 = number of Notified Body for ATEX supervision (CESI)

0 = group II (surface area), category --0

Ex ia IIC T6/T5/T4 Ga = protection mode, gas, temperature classes, EPL -20...+60°C / +75°C / +85°C

Ex ia IIIC T₂₀₀85°C, T₂₀₀100°C, T₂₀₀110°C Da IP65 = protection mode, dust, max surface temp, EPL -20...+60°C / +75°C / +85°C

Correspondence between hazardous areas and categories, EPL (ATEX)

Dangerous zone		Category Directive 2014/34/CE	EPL Equipment
Gases, vapors or mists	Zone 0	1G	Ga
Gases, vapors or mists	Zone 1	2G or 1G	Gb or Ga
Gases, vapors or mists	Zone 2	3G, 2G or 1G	Gc, Gb or Ga
Dust	Zone 20	1D	Da
Dust	Zone 21	2D or 1D	Db or Da
Dust	Zone 22	3D, 2D or 1D	Dc, Db or Da

SAFETY INSTRUCTIONS FOR INSTALLATIONS IN DANGEROUS ZONES


The HIX Melt pressure transmitter must be installed and serviced in conformity to plant engineering and maintenance standards for environments classified at risk of explosion due to the presence of gases (example: EN 60079-14, EN 60079-17 or other national standards) and dust. Please avoid any dust accumulation on the transmitter.

The HIX Melt pressure transmitter must be connected to other equipment (galvanic isolation barriers) with individual ATEX certification such as [Ex ia Ga] IIC having the following characteristics:

maximum voltage $U_0 = 30V$
maximum current $I_0 = 100mA$
maximum power $P_0 = 0,75W$

MOUNTING INSTRUCTIONS FOR INSTALLATIONS IN DANGEROUS ZONES


Based on the application, HIX Melt pressure transmitters must be installed according to the instructions in figure 1.

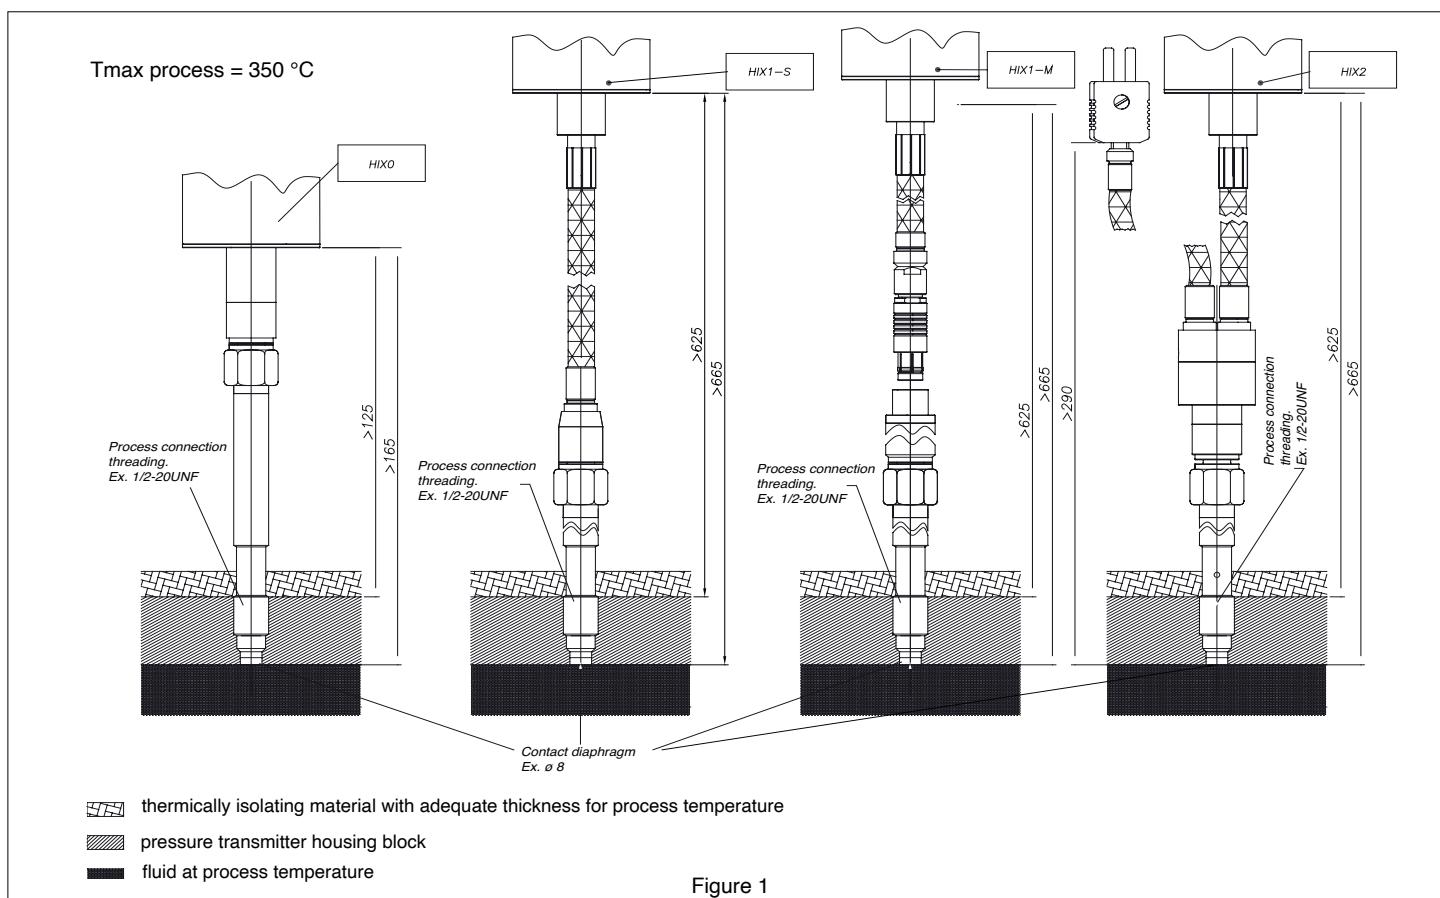

HIX series transducers must be powered by means of galvanic isolation barriers with a maximum of 30V.

The AUTOZERO procedure must be run by means of the transmitters pen by short circuiting the CAL lines as shown in the following figures or by means of HART control.

The CAL procedure must be run by short circuiting the leads directly on the cable or on the connector terminals.

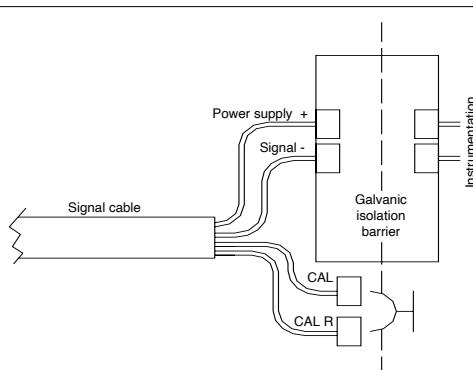

For models HIX2 with temperature measurement, the thermocouple circuit must be powered by means of galvanic isolation barriers with a maximum of 30V.

GEFRAN spa reserves the right to make aesthetic or functional changes at any time and without notice.

GEFRAN

GEFRAN spa
via Sebina, 74 - 25050 PROVAGLIO D'ISEO (BS) - ITALIA
Tel. 030/9888.1 - Telefax. 030/9839063
Internet: <http://www.gefran.com>