



MAIN FEATURES

- Pressure ranges from: 0-35 to 0-1000 bar / 0-500 to 0-15000 psi
- Accuracy: $< \pm 0.25\%$ FS (H); $< \pm 0.5\%$ FS (M)
- Fluid-filled system for temperature stability
- SIL2 and PL d approvals for Functional Safety
- Ex certifications for potentially explosive atmospheres (see details)
- 1/2-20UNF, M18x1.5 standard threads; other types available on request
- Autozero function on board / external option
- 17-7 PH corrugated diaphragm with GTP+ coating

HWX0 The rigid rod configuration provides fast and easy installation

HWX1 The flexible rod configuration is suitable for applications demanding greater thermal isolation and where installation would otherwise be difficult.

HWX2 This configuration lets you measure process pressure and temperature at the same point with a single installation.

HWX3 The configuration with exposed tip is ideal for applications in limited space.

HWX4 Configuration with flange for specific applications.

Main intrinsic safety characteristics

Transmitters are designed and produced in compliance with:

- ATEX Directive 2014/34/EU
- IECEx scheme
- EAC TR CU 012/2011 regulation
- KCs regulation
- Nepsi Ex regulation
- PESO CCoE regulation

Type of Protection:

ATEX: group II, category 1G, 1D

GAS type of protection: Ex ia IIC T6, T5, T4 Ga (Ambient Temp.: -20°C...+60°C / +75°C / +85°C)

DUST type of protection: Ex ia IIIC T₂₀₀85°C, T₂₀₀100°C, T₂₀₀110°C Da IP65 (Ambient Temp.: -20°C...+60°C / +75°C / +85°C)

IECEx/KCs/Nepsi Ex/PESO:

group II, category 1G

GAS type of protection: Ex ia IIC T6, T5, T4 Ga (Ambient Temp.: -20°C...+60°C / +75°C / +85°C)

EAC Ex:

group/category 0

GAS type of protection: Ex ia IIC T6, T5, T4 Ga (Ambient Temp.: -20°C...+60°C / +75°C / +85°C)

DUST type of protection: Ex ia IIIC T₂₀₀85°C, T₂₀₀100°C, T₂₀₀110°C Ab IP65 (Ambient Temp.: -20°C...+60°C / +75°C / +85°C)

Maximum voltage	30 V
Maximum current	100 mA
Maximum power	0,75 W
Maximum inductance (*)	17 mH
Maximum capacity (*)	10 nF

(*) includes inductance levels and capacity of a cable:
(typical L 1 microH/m and typical C 100 pF/m) with maximum length 15m.

The HWX series of Gefran are pressure transmitters with HART communication protocol for using in high temperature environment with explosive atmosphere presence.

The main characteristic of this series is the capability to read pressure of the media up to 315°C.

The constructive principle is based on the hydraulic transmission of the pressure.

The fluid-filled system assures the temperature stability. The physical measure is transformed in a electrical measure by means of strain-gauge technology.

The SIL2 and PL d approvals make the product suitable for use in the **Functional Safety** applications, particularly in the process plants for the production of polymers, where it is an essential requirement.

TECHNICAL SPECIFICATIONS

Accuracy (1)	H $< \pm 0.25\%$ FS (100...1000 bar) M $< \pm 0.5\%$ FS (35...1000 bar)
Resolution	16 Bit
Measurement range	0..35 to 0..1000bar 0..500 to 0..15000psi
Rangeability	3:1
Maximum overpressure (without degrading performances)	2 x FS 1.5 x FS above 500bar/7500psi
Measurement principle	Extensimetric thick film
Power supply	13...30Vdc
Maximum current absorption	23mA
Output signal Full Scale (FS)	20mA
Zero balance (tolerance $\pm 0.25\%$ FS)	4mA
Calibration signal	80% FS
Power supply polarity reverse protection	YES
Compensated temperature range housing	0...+85°C
Operating temperature range housing	-30...+85°C
Storage temperature range housing	-40...+125°C
Thermal drift in compensated range: Zero / Calibration / Sensibility	< 0.02% FS/°C
Diaphragm maximum temperature	315°C / 600°F
Zero drift due to change in process temperature (zero)	< 0.04 bar/°C
Standard material in contact with process medium	Diaphragm: • 17-7 PH corrugated diaphragm with GTP+ coating Stem: • 17-4 PH
Thermocouple (model HWX2)	STD: type "J" (isolated junction)
Protection degree (with 6-pole female connector CON300)	IP66
SIL2 certification	IEC/EN 62061 - IEC 61508
PL d certification	EN ISO 13849

FS = Full scale output

(1) BFSL method (Best Fit Straight Line): includes combined effects of Non-Linearity, Hysteresis and Repeatability (according to IEC 62828-2)

For products sold to EAC Customs Union (EAC mark), due to a different method of calculation, the limits of accuracy are the following:

M = $\pm 1\%$

H = $\pm 0.5\%$

The Melt pressure transmitters must be connected to other equipment (galvanic isolation barriers) with individual Ex certification such as [Ex ia Ga] IIC. The thermocouple circuit must be powered by means of galvanic isolation barriers with a maximum of 30V. EU-Type Examination Certificate number: DNV 21 ATEX 81471

IECEx CoC number: PRE 20.0091

EAC Ex Number: KG 417/043.CN.02.07305


KCs certificate number: 21-KA4BO-0669 (HWX)

Nepsi Ex number: GYJ21.2886X

PESO approval number: A/P/HQ/MH/104/6921 (P520346)


MECHANICAL DIMENSIONS

HWX0

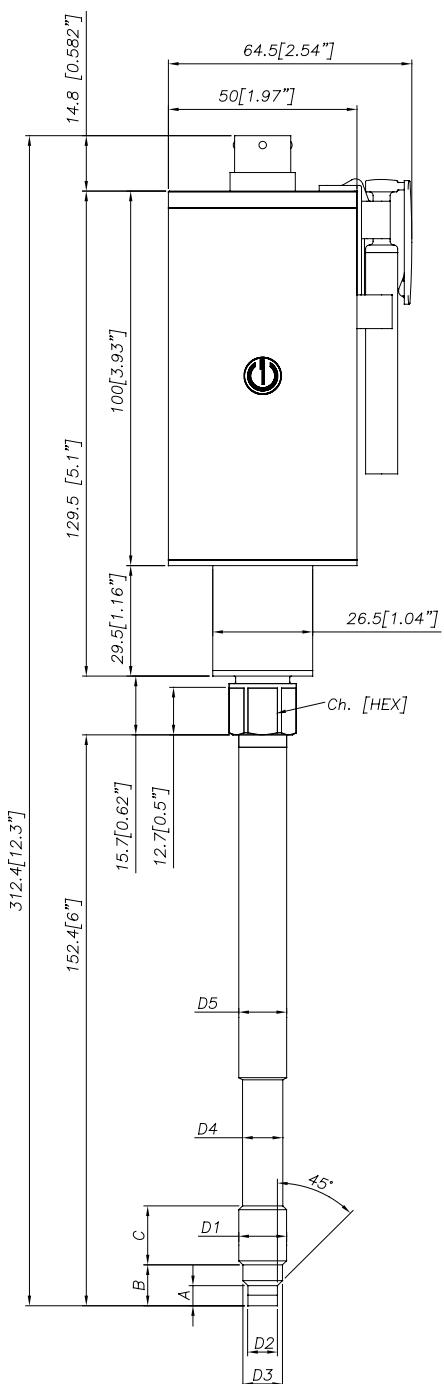

D1	1/2 - 20UNF
D2	ø7.8 -0.05 [ø0.31" -0.002]
D3	ø10.5 -0.025 [ø0.41" -0.001]
D4	ø10.67 [ø0.42"]
D5	ø12.7 [ø0.5"]
A	5.56 -0.26 [0.22" -0.01]
B	11.2 [0.44"]
C	15.74 [0.62"]
Ch [Hex]	16 [5/8"]

HWX1

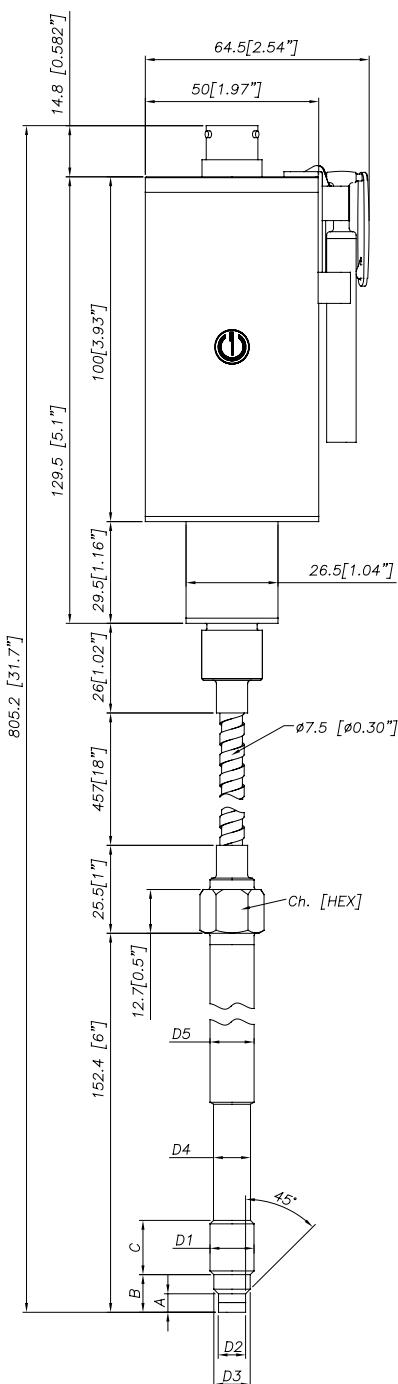


D1	M18x1.5
D2	$\varnothing 10$ -0.05 [$\varnothing 0.394"$ -0.002]
D3	$\varnothing 16$ -0.08 [$\varnothing 0.63"$ -0.003]
D4	$\varnothing 16$ -0.4 [$\varnothing 0.63"$ -0.016]
D5	$\varnothing 18$ [$\varnothing 0.71"$]
A	6 -0.26 [$0.24"$ -0.01]
B	14.8 -0.4 [$0.58"$ -0.016]
C	19 [$0.75"$]
Ch [Hex]	19 [$3/4"$]

NOTE: dimensions refer to rigid stem length option "4" (153 mm- 6")


WARNING: For installation use a maximum tightening torque of 56 Nm (500 in-lb)

MECHANICAL DIMENSIONS

HWX2

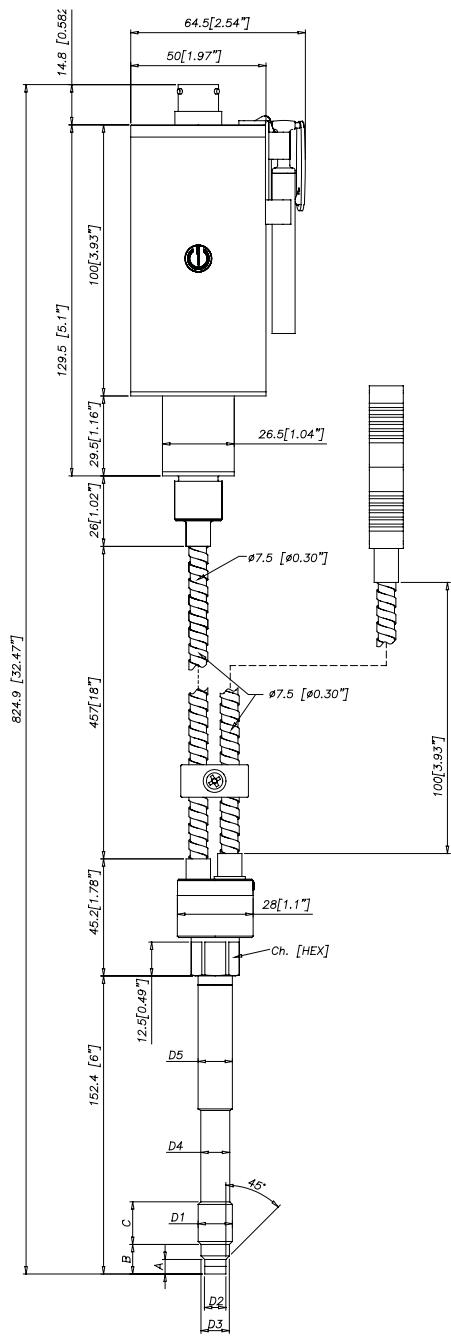

HWX3

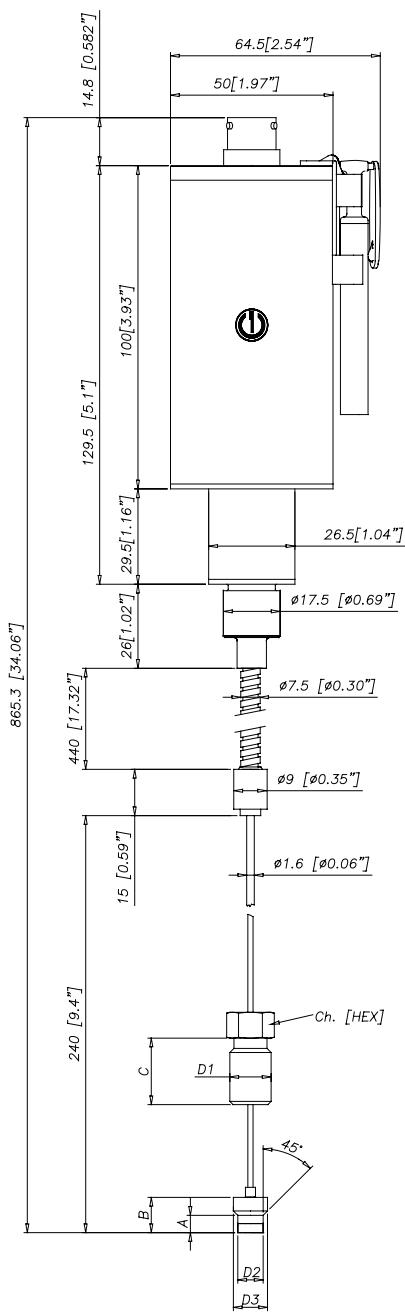

Exposed capillary


D1	1/2-20UNF
D2	.307/.305" [7.80/7.75mm]
D3	.414/.412" [10.52/10.46mm]
A	.145/.151" [3.68/3.84mm]
B	.318/.312" [8.08/7.92mm]
C	.81" [20.6mm]

NOTE: dimensions refer to rigid stem length option "4" (153 mm- 6")

WARNING: For installation use a maximum tightening torque of 56 Nm (500 in-lb)

MECHANICAL DIMENSIONS

HWX4

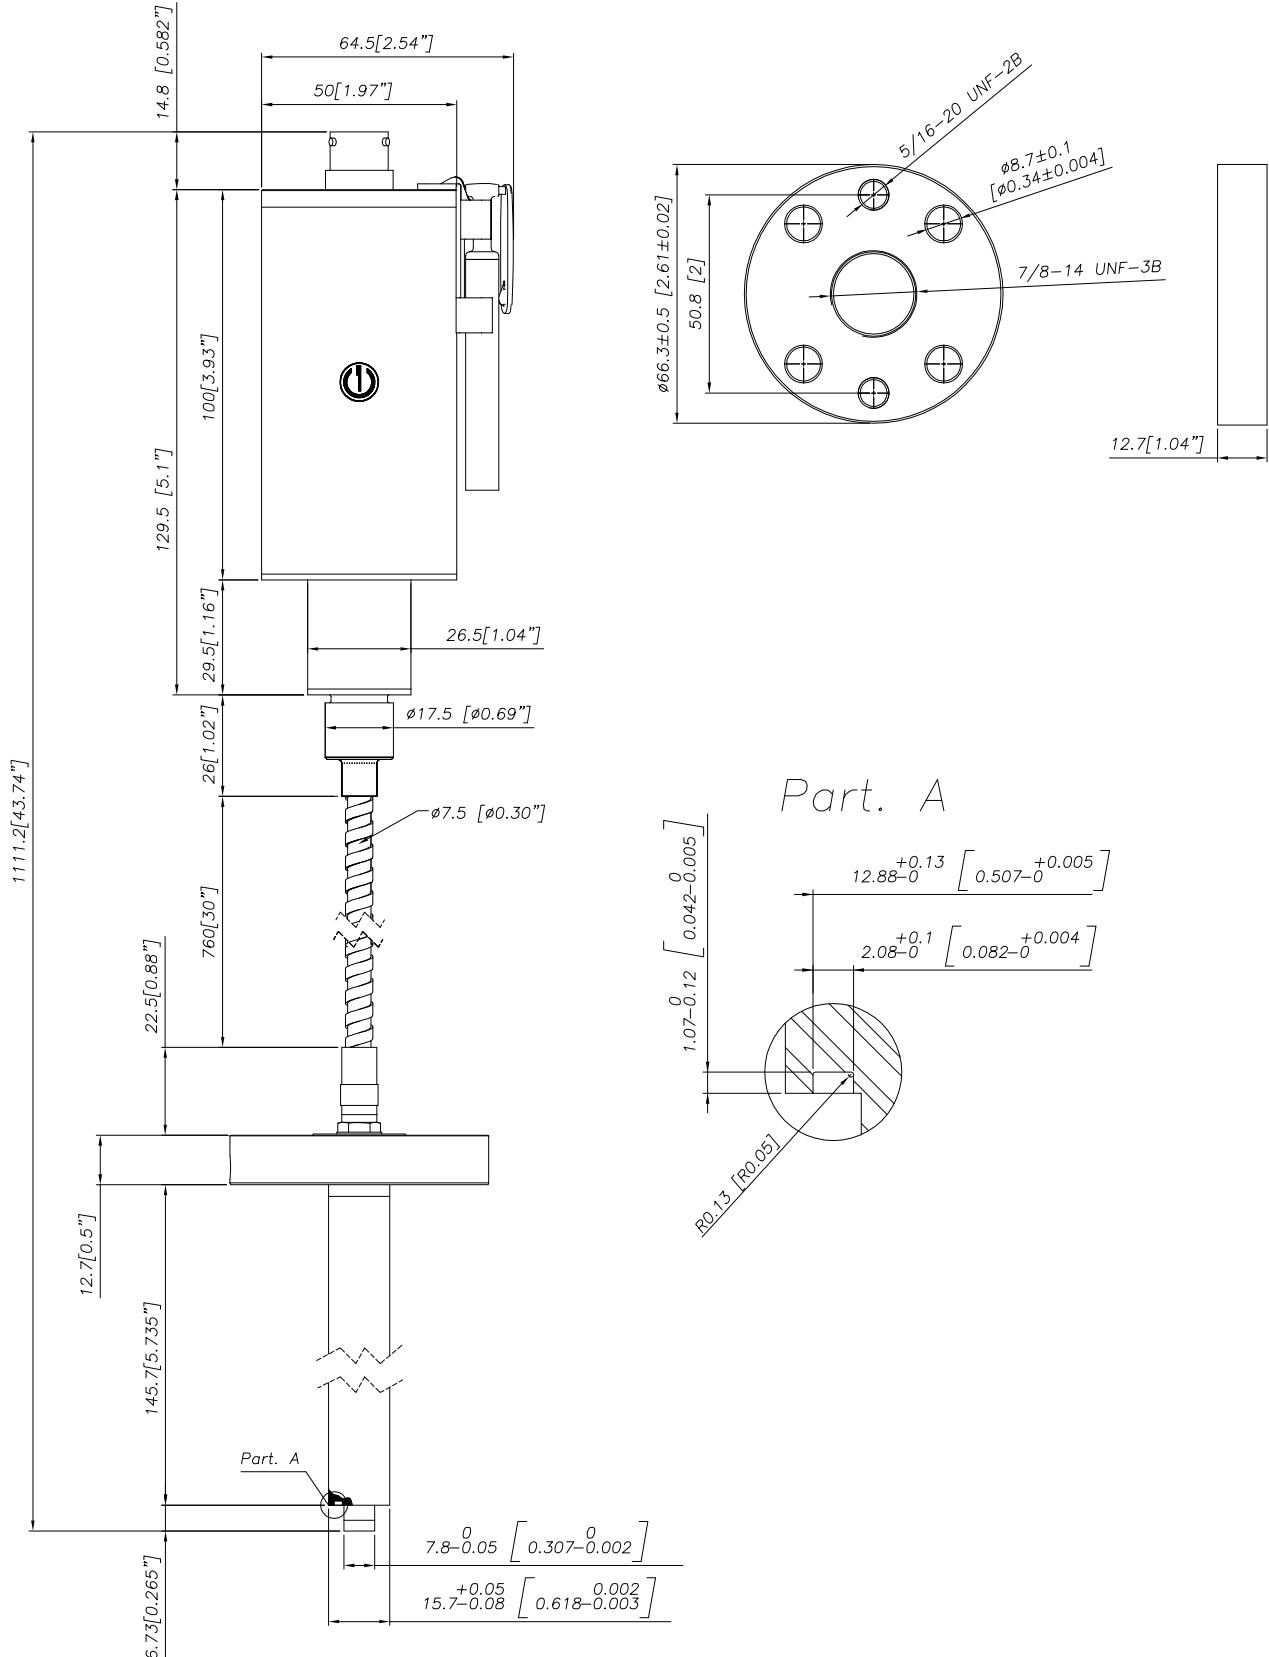

NOTE: dimensions refer to rigid stem length option "4" (153 mm - 6")

SELF DIAGNOSTICS (ONLY FOR SIL2 / PL d VERSIONS)

Below the conditions detected by the sensor self-diagnostics:

- Cut cable / device non connected / broken power supply, output $\leq 3.6\text{mA}$
- Pin detachment output $\leq 3.6\text{mA}$
- Broken primary element $\geq 21\text{mA}$
- Pressure above 200% of the span, output $\geq 21\text{mA}$
- Voltage monitor in case of overvoltage/undervoltage/voltage variation in the electronics, output $\leq 3.6\text{mA}$ (*)
- Program sequence error, output $\leq 3.6\text{mA}$ (*)
- Overtemperature on the electronics, output $\leq 3.6\text{mA}$ (*)
- Error on the primary element output or on the first amplification stage, output $\geq 21\text{mA}$

(*) In such conditions the Alarm Type can be programmed via HART at $\geq 21\text{ mA}$.

NAMUR COMPLIANCE (ONLY FOR SIL2 / PL d VERSIONS)

The sensors are tested according to Namur NE21 recommendations. The same compatibility is valid for the NE43 Namur recommendation with the following sensor behaviour in case of breakdown:

- Cut cable: breakdown information as the signal is $\leq 3.6\text{mA}$
- Device not connected: breakdown information as the signal is $\leq 3.6\text{mA}$
- Broken power-supply: breakdown information as the signal is $\leq 3.6\text{mA}$ or in case of performance problems:
- Broken primary element $\geq 21\text{mA}$
- Pressure above 200% of the span, output $\geq 21\text{mA}$
- Others $\leq 3.6\text{mA}$ (*)


(*) In such a condition the Alarm Type can be programmed via HART at $\geq 21\text{ mA}$.

Note: in all the remaining situations, the output signal is always included between 3.8 and 20.5mA




Recommendation: the error level set by the customer (e.g. maximum pressure value) has to be inside the nominal range.

LOAD DIAGRAM

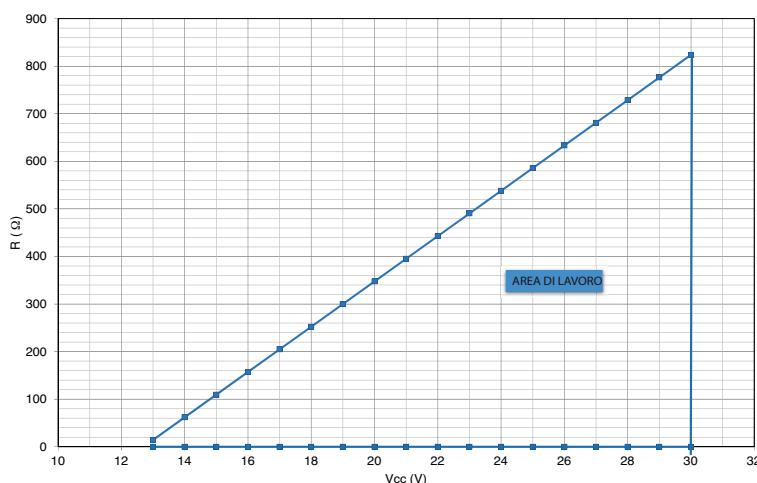

The diagram shows the optimum ratio between load and power supply for transmitters with 4...20mA output. For correct function, use a combination of load resistance and voltage that falls within the two lines in the graph above.

AUTOZERO FUNCTION

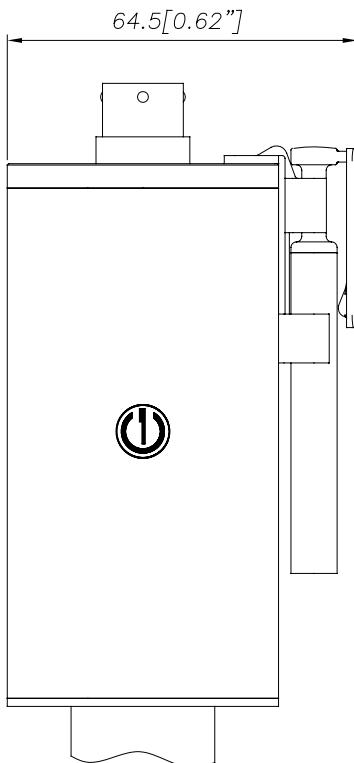


The Autozero function is activated through a magnetic contact (external magnet supplied with the sensor).

The Autozero function can be activated through HART com-mand as well.

See the manual for a complete Autozero function explana-tion.


ELECTRICAL CONNECTIONS

CURRENT OUTPUT


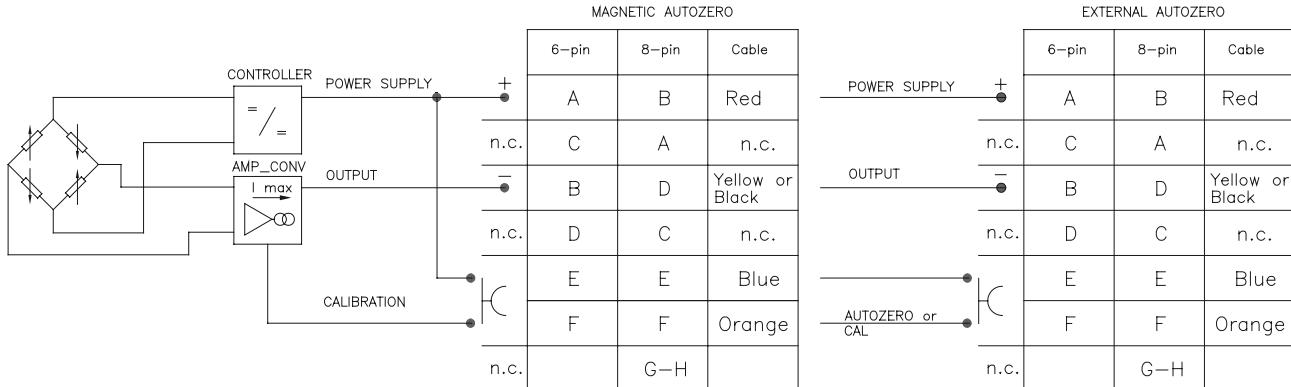


The cable shield is tied to both sides, i.e. to the sensor connector and to the controller

6 pin Connector
VPT07RA10-6PT2 (PT02A-10-6P)

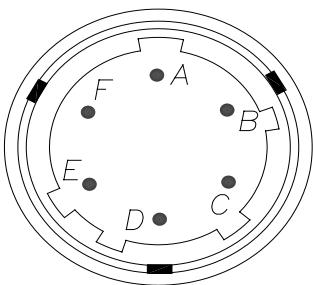

8 pin Connector
(PC02E-12-8P) Bendix

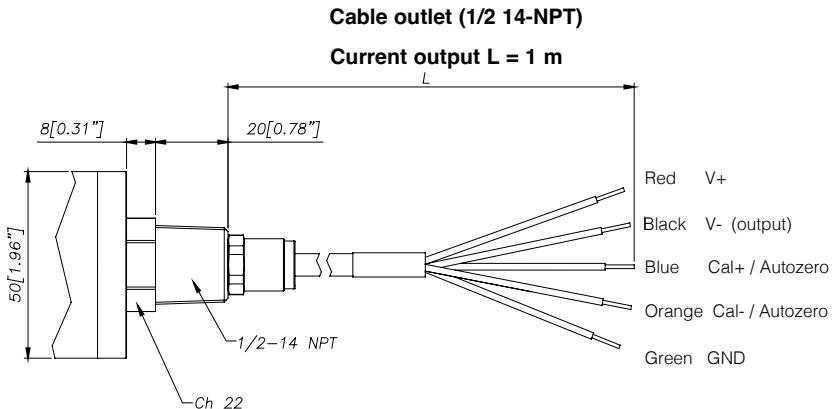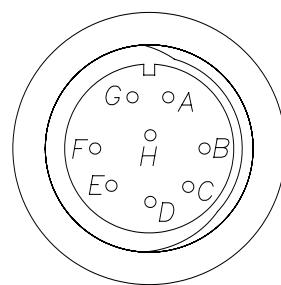

ACCESSORIES

Connectors

6-pin female connector (IP66 protection degree) **CON300**
8-pin female connector **CON307**

Accessories

Mounting bracket
Silver-plated copper washer
Dummy plug for 1/2-20UNF
Dummy plug for M18x1.5
Drill kit for 1/2-20UNF
Drill kit for M18x1.5
Cleaning kit for 1/2-20UNF
Cleaning kit for M18x1.5
Fixing pen clip
Autozero pen

SF18
RON007
SC12
SC18
KF12
KF18
CT12
CT18
PKIT 1032
PKIT 378

Extension cables

6-pin connector with 3mt Atex cable **PCAV221**
6-pin connector with 4mt Atex cable **PCAV104**
6-pin connector with 5mt Atex cable **PCAV105**
6-pin connector with 10mt Atex cable **PCAV106**

Termocoppie per il modello HWX2
Type "J" (for rigid rod 153mm - 6")

TTER 601

Cable color code	
Conn.	Wire
A-2	Red
B-4	Black
C-1	White
D-6	Green
E-7	Blue
F-3	Orange
5	Grey
8	Pink


PROCESS FLANGE ADAPTER

The process flange adapter is a sensor accessory that allows for the installation of 1/2-20 UNF or M18x1.5 melt pressure sensor in a button seal style process mounting port. The adapter is made with an adapter body with different snout lengths plus an adapter flange available in different sizes (see tables and drawing below). Each combination of snout and flange is available according to the ordering information with a specific ordering code.

SPECIFICATIONS

- Pressure range: according to the selected sensor (up to 1000 bar/15000 psi max)
- Temperature range: according to the selected sensor
- Material of construction: 17-4PH Stainless steel


ADAPTER BODY

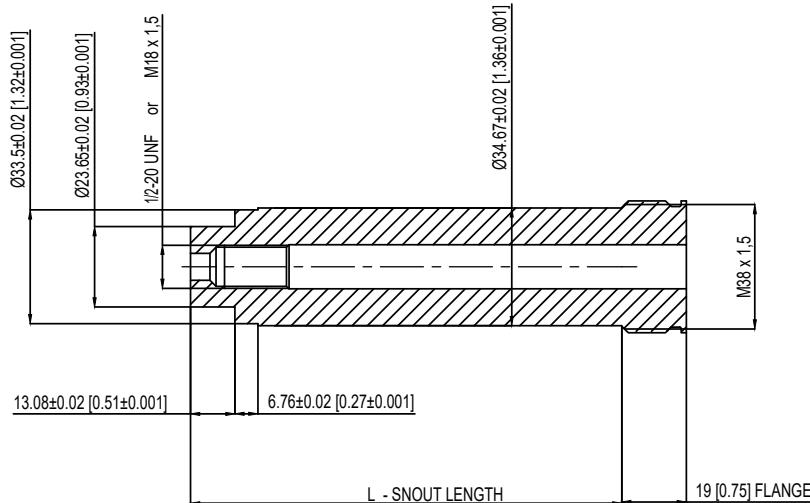

1/2-20 UNF	L - SNOUT LENGTH
STE1020	127 [5]
STE1021	51,6 [2,031]

M18 X 1,5	L - SNOUT LENGTH
STE1022	127 [5]
STE1023	51,6 [2,031]

ADAPTER FLANGE

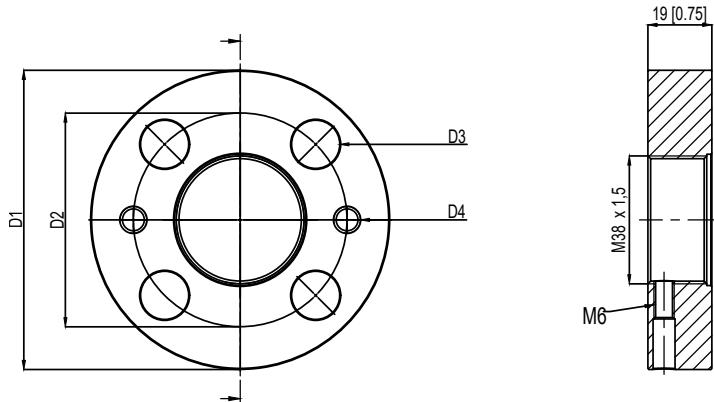

	FLA960	FLA961
D1	82,6 [3,25]	88,9 [3,50]
D2	54 [2,14]	63,5 [2,50]
D3	13,2 [0,52]	14,3 [0,56]
D4	5/16-18 UNC	5/16-18 UNC

ORDER CODE

KIT	- 5 - 0 - 1
Snout length	
5 inch [127 mm]	5
2,031 inch [51,6 mm]	2
Flange type (see technical drawing)	
FLA960	0
FLA961	1
Thread dimensions	
1/2-20 UNF	1
M18 x 1,5	4

ADAPTER GASKESTS			
Material	Dimensions	Max Pressure	Ord. Code
Aluminium	30.2 mm [1.19"] OD 24.1 mm [.950"] ID	200 bar/3000 psi	RON360
AISI 303 SS	30.2 mm [1.19"] OD 24.1 mm [.950"] ID	700 bar/10000 psi	RON361

Example:

KIT501

Process adapter with 5" snout length, 82.6 mm size flange, suitable for 1/2-20 UNF melt sensor

ORDER CODE

HW		000 0 X 000 X 0																																																																																																																																																																																																		
OUTPUT SIGNAL		<table border="1"> <tr><td>0</td><td>ATEX Approval</td></tr> <tr><td>I</td><td>IECEx Approval</td></tr> <tr><td>E</td><td>EAC Ex Approval (*)</td></tr> <tr><td>K</td><td>KCs Approval</td></tr> <tr><td>N</td><td>Nepsi Ex Approval</td></tr> <tr><td>P</td><td>PESO Approval</td></tr> </table>		0	ATEX Approval	I	IECEx Approval	E	EAC Ex Approval (*)	K	KCs Approval	N	Nepsi Ex Approval	P	PESO Approval																																																																																																																																																																																					
0	ATEX Approval																																																																																																																																																																																																			
I	IECEx Approval																																																																																																																																																																																																			
E	EAC Ex Approval (*)																																																																																																																																																																																																			
K	KCs Approval																																																																																																																																																																																																			
N	Nepsi Ex Approval																																																																																																																																																																																																			
P	PESO Approval																																																																																																																																																																																																			
VERSION		<table border="1"> <tr><td>0</td><td>Rigid rod</td></tr> <tr><td>1</td><td>Rigid + flexible rod</td></tr> <tr><td>2</td><td>With thermocouple</td></tr> <tr><td>3</td><td>Exposed capillary</td></tr> <tr><td>4</td><td>Flange mounting</td></tr> </table>		0	Rigid rod	1	Rigid + flexible rod	2	With thermocouple	3	Exposed capillary	4	Flange mounting																																																																																																																																																																																							
0	Rigid rod																																																																																																																																																																																																			
1	Rigid + flexible rod																																																																																																																																																																																																			
2	With thermocouple																																																																																																																																																																																																			
3	Exposed capillary																																																																																																																																																																																																			
4	Flange mounting																																																																																																																																																																																																			
CONNECTOR		<table border="1"> <tr><td>6</td><td>6 pin</td></tr> <tr><td>8</td><td>8 pin</td></tr> <tr><td>N</td><td>NPT Cable</td></tr> </table>		6	6 pin	8	8 pin	N	NPT Cable																																																																																																																																																																																											
6	6 pin																																																																																																																																																																																																			
8	8 pin																																																																																																																																																																																																			
N	NPT Cable																																																																																																																																																																																																			
ACCURACY CLASS		<table border="1"> <tr><td>0.25% FS (ranges \geq 100 bar/1500 psi)</td><td>H</td></tr> <tr><td>0.5% FS</td><td>M</td></tr> </table>		0.25% FS (ranges \geq 100 bar/1500 psi)	H	0.5% FS	M																																																																																																																																																																																													
0.25% FS (ranges \geq 100 bar/1500 psi)	H																																																																																																																																																																																																			
0.5% FS	M																																																																																																																																																																																																			
MEASUREMENT RANGE		<table border="1"> <thead> <tr><th>bar</th><th>psi</th></tr> </thead> <tbody> <tr><td>35</td><td>B35U</td><td>500</td><td>P05C</td></tr> <tr><td>50</td><td>B05D</td><td>750</td><td>P75D</td></tr> <tr><td>70</td><td>B07D</td><td>1000</td><td>P01M</td></tr> <tr><td>100</td><td>B01C</td><td>1500</td><td>P15C</td></tr> <tr><td>200</td><td>B02C</td><td>3000</td><td>P03M</td></tr> <tr><td>350</td><td>B35D</td><td>5000</td><td>P05M</td></tr> <tr><td>500</td><td>B05C</td><td>7500</td><td>P75C</td></tr> <tr><td>700</td><td>B07C</td><td>10000</td><td>P10M</td></tr> <tr><td>1000</td><td>B01M</td><td>15000</td><td>P15M</td></tr> </tbody> </table>		bar	psi	35	B35U	500	P05C	50	B05D	750	P75D	70	B07D	1000	P01M	100	B01C	1500	P15C	200	B02C	3000	P03M	350	B35D	5000	P05M	500	B05C	7500	P75C	700	B07C	10000	P10M	1000	B01M	15000	P15M																																																																																																																																																											
bar	psi																																																																																																																																																																																																			
35	B35U	500	P05C																																																																																																																																																																																																	
50	B05D	750	P75D																																																																																																																																																																																																	
70	B07D	1000	P01M																																																																																																																																																																																																	
100	B01C	1500	P15C																																																																																																																																																																																																	
200	B02C	3000	P03M																																																																																																																																																																																																	
350	B35D	5000	P05M																																																																																																																																																																																																	
500	B05C	7500	P75C																																																																																																																																																																																																	
700	B07C	10000	P10M																																																																																																																																																																																																	
1000	B01M	15000	P15M																																																																																																																																																																																																	
THREADING		<table border="1"> <thead> <tr><th colspan="2">Standard</th></tr> </thead> <tbody> <tr><td>1/2 - 20 UNF</td><td>1</td></tr> <tr><td>M18 x 1.5</td><td>4</td></tr> <tr><td>Flange mounting \varnothing 66.3mm (2.61")</td><td>6</td></tr> <tr><th colspan="2">Available on request</th></tr> <tr><td>M10 x 1.0</td><td>2</td></tr> <tr><td>M14 x 1.0</td><td>3</td></tr> </tbody> </table>		Standard		1/2 - 20 UNF	1	M18 x 1.5	4	Flange mounting \varnothing 66.3mm (2.61")	6	Available on request		M10 x 1.0	2	M14 x 1.0	3																																																																																																																																																																																			
Standard																																																																																																																																																																																																				
1/2 - 20 UNF	1																																																																																																																																																																																																			
M18 x 1.5	4																																																																																																																																																																																																			
Flange mounting \varnothing 66.3mm (2.61")	6																																																																																																																																																																																																			
Available on request																																																																																																																																																																																																				
M10 x 1.0	2																																																																																																																																																																																																			
M14 x 1.0	3																																																																																																																																																																																																			
<p>Example HWX1-6-M-B07C-1-4-D-0-0-4</p> <p>Melt pressure transmitter, 4...20mA output with HART protocol, 6-pin connector, 1/2-20 UNF threading, 700 bar pressure range, 0.5% accuracy, 153 mm (6") rigid rod, 457 mm (18") flexible rod, temperature class T4 (-20°C...+85°C).</p> <p>Sensors are manufactured in compliance with:</p> <ul style="list-style-type: none"> - EMC compatibility directive: 2014/30/EU - MACHINERY directive: 2006/42/EC - RoHS directive : 2011/65/EU - Ex Regulations (see page 1) <p>Electrical installation requirements and conformity certificate are available on our web site: www.gefran.com</p>																																																																																																																																																																																																				
<table border="1"> <tr><td>000= Special executions</td></tr> <tr> <td colspan="2"> <table border="1"> <tr><td>4</td><td>ATEX / EAC Ex</td><td>IECEx/ KCs/ Nepsi Ex/ PESO</td><td>Tamb</td></tr> <tr><td>5</td><td>T4/T₂₀₀110°C</td><td>T4</td><td>-20°C/+85 °C</td></tr> <tr><td>6</td><td>T5/T₂₀₀100°C</td><td>T5</td><td>-20°C/+75 °C</td></tr> <tr><td></td><td>T6/T₂₀₀85°C</td><td>T6</td><td>-20°C/+60 °C</td></tr> <tr><td>E</td><td>External Autozero (*)</td><td colspan="2"></td></tr> <tr><td>0</td><td>Magnetic Autozero</td><td colspan="2"></td></tr> </table> </td> </tr> <tr> <td colspan="4">(*) as an alternative to the CAL function</td> </tr> <tr> <td colspan="2"> <table border="1"> <tr><td>P</td><td>Performance Level='d'</td></tr> <tr><td>S</td><td>SIL2</td></tr> <tr><td>0</td><td>Standard 4...20mA</td></tr> </table> </td> <td colspan="2"> <table border="1"> <tr><td colspan="4">FLEXIBLE ROD LENGTH (mm/inches)</td></tr> <tr><td colspan="4">Standard (HWX0)</td></tr> <tr><td>0</td><td>none</td><td colspan="2"></td></tr> <tr><td colspan="4">Standard (HWX1, HWX2, HWX4)</td></tr> <tr><td>D</td><td>457mm</td><td colspan="2">18"</td></tr> <tr><td>E</td><td>610mm</td><td colspan="2">24"</td></tr> <tr><td>F</td><td>760mm</td><td colspan="2">30"</td></tr> <tr><td colspan="4">Standard (HWX3)</td></tr> <tr><td>L</td><td>711mm</td><td colspan="2">28"</td></tr> <tr><td colspan="4">Available on request</td></tr> <tr><td>A</td><td>76mm</td><td colspan="2">3"</td></tr> <tr><td>B</td><td>152mm</td><td colspan="2">6"</td></tr> <tr><td>C</td><td>300mm</td><td colspan="2">12"</td></tr> <tr><td>G</td><td>914mm</td><td colspan="2">36"</td></tr> <tr><td>H</td><td>1067mm</td><td colspan="2">42"</td></tr> <tr><td>I</td><td>1220mm</td><td colspan="2">48"</td></tr> <tr><td>J</td><td>1372mm</td><td colspan="2">54"</td></tr> <tr><td>K</td><td>1520mm</td><td colspan="2">60"</td></tr> </table> </td> </tr> <tr> <td colspan="4"> <table border="1"> <tr><td colspan="4">RIGID ROD LENGTH (mm/inches)</td></tr> <tr><td colspan="4">Standard (HWX0, HWX1, HWX2)</td></tr> <tr><td>4</td><td>153mm</td><td colspan="2">6"</td></tr> <tr><td>5</td><td>318mm</td><td colspan="2">12.5"</td></tr> <tr><td colspan="4">Standard (HWX3)</td></tr> <tr><td>0</td><td>none</td><td colspan="2"></td></tr> <tr><td colspan="4">Available on request</td></tr> <tr><td>1</td><td>38mm</td><td colspan="2">1,5"</td></tr> <tr><td>2</td><td>50mm</td><td colspan="2">2"</td></tr> <tr><td>3</td><td>76mm</td><td colspan="2">3"</td></tr> <tr><td>6</td><td>350mm</td><td colspan="2">14"</td></tr> <tr><td>7</td><td>400mm</td><td colspan="2">16"</td></tr> <tr><td>8</td><td>456mm</td><td colspan="2">18"</td></tr> <tr><td colspan="4">Standard (HWX4)</td></tr> <tr><td>4</td><td>153mm</td><td colspan="2">6"</td></tr> <tr><td colspan="4">Available on request</td></tr> <tr><td>H</td><td>102mm</td><td colspan="2">4"</td></tr> <tr><td>M</td><td>229mm</td><td colspan="2">9"</td></tr> <tr><td>5</td><td>305mm</td><td colspan="2">12"</td></tr> </table> </td> </tr> </table>				000= Special executions	<table border="1"> <tr><td>4</td><td>ATEX / EAC Ex</td><td>IECEx/ KCs/ Nepsi Ex/ PESO</td><td>Tamb</td></tr> <tr><td>5</td><td>T4/T₂₀₀110°C</td><td>T4</td><td>-20°C/+85 °C</td></tr> <tr><td>6</td><td>T5/T₂₀₀100°C</td><td>T5</td><td>-20°C/+75 °C</td></tr> <tr><td></td><td>T6/T₂₀₀85°C</td><td>T6</td><td>-20°C/+60 °C</td></tr> <tr><td>E</td><td>External Autozero (*)</td><td colspan="2"></td></tr> <tr><td>0</td><td>Magnetic Autozero</td><td colspan="2"></td></tr> </table>		4	ATEX / EAC Ex	IECEx/ KCs/ Nepsi Ex/ PESO	Tamb	5	T4/T ₂₀₀ 110°C	T4	-20°C/+85 °C	6	T5/T ₂₀₀ 100°C	T5	-20°C/+75 °C		T6/T ₂₀₀ 85°C	T6	-20°C/+60 °C	E	External Autozero (*)			0	Magnetic Autozero			(*) as an alternative to the CAL function				<table border="1"> <tr><td>P</td><td>Performance Level='d'</td></tr> <tr><td>S</td><td>SIL2</td></tr> <tr><td>0</td><td>Standard 4...20mA</td></tr> </table>		P	Performance Level='d'	S	SIL2	0	Standard 4...20mA	<table border="1"> <tr><td colspan="4">FLEXIBLE ROD LENGTH (mm/inches)</td></tr> <tr><td colspan="4">Standard (HWX0)</td></tr> <tr><td>0</td><td>none</td><td colspan="2"></td></tr> <tr><td colspan="4">Standard (HWX1, HWX2, HWX4)</td></tr> <tr><td>D</td><td>457mm</td><td colspan="2">18"</td></tr> <tr><td>E</td><td>610mm</td><td colspan="2">24"</td></tr> <tr><td>F</td><td>760mm</td><td colspan="2">30"</td></tr> <tr><td colspan="4">Standard (HWX3)</td></tr> <tr><td>L</td><td>711mm</td><td colspan="2">28"</td></tr> <tr><td colspan="4">Available on request</td></tr> <tr><td>A</td><td>76mm</td><td colspan="2">3"</td></tr> <tr><td>B</td><td>152mm</td><td colspan="2">6"</td></tr> <tr><td>C</td><td>300mm</td><td colspan="2">12"</td></tr> <tr><td>G</td><td>914mm</td><td colspan="2">36"</td></tr> <tr><td>H</td><td>1067mm</td><td colspan="2">42"</td></tr> <tr><td>I</td><td>1220mm</td><td colspan="2">48"</td></tr> <tr><td>J</td><td>1372mm</td><td colspan="2">54"</td></tr> <tr><td>K</td><td>1520mm</td><td colspan="2">60"</td></tr> </table>		FLEXIBLE ROD LENGTH (mm/inches)				Standard (HWX0)				0	none			Standard (HWX1, HWX2, HWX4)				D	457mm	18"		E	610mm	24"		F	760mm	30"		Standard (HWX3)				L	711mm	28"		Available on request				A	76mm	3"		B	152mm	6"		C	300mm	12"		G	914mm	36"		H	1067mm	42"		I	1220mm	48"		J	1372mm	54"		K	1520mm	60"		<table border="1"> <tr><td colspan="4">RIGID ROD LENGTH (mm/inches)</td></tr> <tr><td colspan="4">Standard (HWX0, HWX1, HWX2)</td></tr> <tr><td>4</td><td>153mm</td><td colspan="2">6"</td></tr> <tr><td>5</td><td>318mm</td><td colspan="2">12.5"</td></tr> <tr><td colspan="4">Standard (HWX3)</td></tr> <tr><td>0</td><td>none</td><td colspan="2"></td></tr> <tr><td colspan="4">Available on request</td></tr> <tr><td>1</td><td>38mm</td><td colspan="2">1,5"</td></tr> <tr><td>2</td><td>50mm</td><td colspan="2">2"</td></tr> <tr><td>3</td><td>76mm</td><td colspan="2">3"</td></tr> <tr><td>6</td><td>350mm</td><td colspan="2">14"</td></tr> <tr><td>7</td><td>400mm</td><td colspan="2">16"</td></tr> <tr><td>8</td><td>456mm</td><td colspan="2">18"</td></tr> <tr><td colspan="4">Standard (HWX4)</td></tr> <tr><td>4</td><td>153mm</td><td colspan="2">6"</td></tr> <tr><td colspan="4">Available on request</td></tr> <tr><td>H</td><td>102mm</td><td colspan="2">4"</td></tr> <tr><td>M</td><td>229mm</td><td colspan="2">9"</td></tr> <tr><td>5</td><td>305mm</td><td colspan="2">12"</td></tr> </table>				RIGID ROD LENGTH (mm/inches)				Standard (HWX0, HWX1, HWX2)				4	153mm	6"		5	318mm	12.5"		Standard (HWX3)				0	none			Available on request				1	38mm	1,5"		2	50mm	2"		3	76mm	3"		6	350mm	14"		7	400mm	16"		8	456mm	18"		Standard (HWX4)				4	153mm	6"		Available on request				H	102mm	4"		M	229mm	9"		5	305mm	12"	
000= Special executions																																																																																																																																																																																																				
<table border="1"> <tr><td>4</td><td>ATEX / EAC Ex</td><td>IECEx/ KCs/ Nepsi Ex/ PESO</td><td>Tamb</td></tr> <tr><td>5</td><td>T4/T₂₀₀110°C</td><td>T4</td><td>-20°C/+85 °C</td></tr> <tr><td>6</td><td>T5/T₂₀₀100°C</td><td>T5</td><td>-20°C/+75 °C</td></tr> <tr><td></td><td>T6/T₂₀₀85°C</td><td>T6</td><td>-20°C/+60 °C</td></tr> <tr><td>E</td><td>External Autozero (*)</td><td colspan="2"></td></tr> <tr><td>0</td><td>Magnetic Autozero</td><td colspan="2"></td></tr> </table>		4	ATEX / EAC Ex	IECEx/ KCs/ Nepsi Ex/ PESO	Tamb	5	T4/T ₂₀₀ 110°C	T4	-20°C/+85 °C	6	T5/T ₂₀₀ 100°C	T5	-20°C/+75 °C		T6/T ₂₀₀ 85°C	T6	-20°C/+60 °C	E	External Autozero (*)			0	Magnetic Autozero																																																																																																																																																																													
4	ATEX / EAC Ex	IECEx/ KCs/ Nepsi Ex/ PESO	Tamb																																																																																																																																																																																																	
5	T4/T ₂₀₀ 110°C	T4	-20°C/+85 °C																																																																																																																																																																																																	
6	T5/T ₂₀₀ 100°C	T5	-20°C/+75 °C																																																																																																																																																																																																	
	T6/T ₂₀₀ 85°C	T6	-20°C/+60 °C																																																																																																																																																																																																	
E	External Autozero (*)																																																																																																																																																																																																			
0	Magnetic Autozero																																																																																																																																																																																																			
(*) as an alternative to the CAL function																																																																																																																																																																																																				
<table border="1"> <tr><td>P</td><td>Performance Level='d'</td></tr> <tr><td>S</td><td>SIL2</td></tr> <tr><td>0</td><td>Standard 4...20mA</td></tr> </table>		P	Performance Level='d'	S	SIL2	0	Standard 4...20mA	<table border="1"> <tr><td colspan="4">FLEXIBLE ROD LENGTH (mm/inches)</td></tr> <tr><td colspan="4">Standard (HWX0)</td></tr> <tr><td>0</td><td>none</td><td colspan="2"></td></tr> <tr><td colspan="4">Standard (HWX1, HWX2, HWX4)</td></tr> <tr><td>D</td><td>457mm</td><td colspan="2">18"</td></tr> <tr><td>E</td><td>610mm</td><td colspan="2">24"</td></tr> <tr><td>F</td><td>760mm</td><td colspan="2">30"</td></tr> <tr><td colspan="4">Standard (HWX3)</td></tr> <tr><td>L</td><td>711mm</td><td colspan="2">28"</td></tr> <tr><td colspan="4">Available on request</td></tr> <tr><td>A</td><td>76mm</td><td colspan="2">3"</td></tr> <tr><td>B</td><td>152mm</td><td colspan="2">6"</td></tr> <tr><td>C</td><td>300mm</td><td colspan="2">12"</td></tr> <tr><td>G</td><td>914mm</td><td colspan="2">36"</td></tr> <tr><td>H</td><td>1067mm</td><td colspan="2">42"</td></tr> <tr><td>I</td><td>1220mm</td><td colspan="2">48"</td></tr> <tr><td>J</td><td>1372mm</td><td colspan="2">54"</td></tr> <tr><td>K</td><td>1520mm</td><td colspan="2">60"</td></tr> </table>		FLEXIBLE ROD LENGTH (mm/inches)				Standard (HWX0)				0	none			Standard (HWX1, HWX2, HWX4)				D	457mm	18"		E	610mm	24"		F	760mm	30"		Standard (HWX3)				L	711mm	28"		Available on request				A	76mm	3"		B	152mm	6"		C	300mm	12"		G	914mm	36"		H	1067mm	42"		I	1220mm	48"		J	1372mm	54"		K	1520mm	60"																																																																																																																				
P	Performance Level='d'																																																																																																																																																																																																			
S	SIL2																																																																																																																																																																																																			
0	Standard 4...20mA																																																																																																																																																																																																			
FLEXIBLE ROD LENGTH (mm/inches)																																																																																																																																																																																																				
Standard (HWX0)																																																																																																																																																																																																				
0	none																																																																																																																																																																																																			
Standard (HWX1, HWX2, HWX4)																																																																																																																																																																																																				
D	457mm	18"																																																																																																																																																																																																		
E	610mm	24"																																																																																																																																																																																																		
F	760mm	30"																																																																																																																																																																																																		
Standard (HWX3)																																																																																																																																																																																																				
L	711mm	28"																																																																																																																																																																																																		
Available on request																																																																																																																																																																																																				
A	76mm	3"																																																																																																																																																																																																		
B	152mm	6"																																																																																																																																																																																																		
C	300mm	12"																																																																																																																																																																																																		
G	914mm	36"																																																																																																																																																																																																		
H	1067mm	42"																																																																																																																																																																																																		
I	1220mm	48"																																																																																																																																																																																																		
J	1372mm	54"																																																																																																																																																																																																		
K	1520mm	60"																																																																																																																																																																																																		
<table border="1"> <tr><td colspan="4">RIGID ROD LENGTH (mm/inches)</td></tr> <tr><td colspan="4">Standard (HWX0, HWX1, HWX2)</td></tr> <tr><td>4</td><td>153mm</td><td colspan="2">6"</td></tr> <tr><td>5</td><td>318mm</td><td colspan="2">12.5"</td></tr> <tr><td colspan="4">Standard (HWX3)</td></tr> <tr><td>0</td><td>none</td><td colspan="2"></td></tr> <tr><td colspan="4">Available on request</td></tr> <tr><td>1</td><td>38mm</td><td colspan="2">1,5"</td></tr> <tr><td>2</td><td>50mm</td><td colspan="2">2"</td></tr> <tr><td>3</td><td>76mm</td><td colspan="2">3"</td></tr> <tr><td>6</td><td>350mm</td><td colspan="2">14"</td></tr> <tr><td>7</td><td>400mm</td><td colspan="2">16"</td></tr> <tr><td>8</td><td>456mm</td><td colspan="2">18"</td></tr> <tr><td colspan="4">Standard (HWX4)</td></tr> <tr><td>4</td><td>153mm</td><td colspan="2">6"</td></tr> <tr><td colspan="4">Available on request</td></tr> <tr><td>H</td><td>102mm</td><td colspan="2">4"</td></tr> <tr><td>M</td><td>229mm</td><td colspan="2">9"</td></tr> <tr><td>5</td><td>305mm</td><td colspan="2">12"</td></tr> </table>				RIGID ROD LENGTH (mm/inches)				Standard (HWX0, HWX1, HWX2)				4	153mm	6"		5	318mm	12.5"		Standard (HWX3)				0	none			Available on request				1	38mm	1,5"		2	50mm	2"		3	76mm	3"		6	350mm	14"		7	400mm	16"		8	456mm	18"		Standard (HWX4)				4	153mm	6"		Available on request				H	102mm	4"		M	229mm	9"		5	305mm	12"																																																																																																																						
RIGID ROD LENGTH (mm/inches)																																																																																																																																																																																																				
Standard (HWX0, HWX1, HWX2)																																																																																																																																																																																																				
4	153mm	6"																																																																																																																																																																																																		
5	318mm	12.5"																																																																																																																																																																																																		
Standard (HWX3)																																																																																																																																																																																																				
0	none																																																																																																																																																																																																			
Available on request																																																																																																																																																																																																				
1	38mm	1,5"																																																																																																																																																																																																		
2	50mm	2"																																																																																																																																																																																																		
3	76mm	3"																																																																																																																																																																																																		
6	350mm	14"																																																																																																																																																																																																		
7	400mm	16"																																																																																																																																																																																																		
8	456mm	18"																																																																																																																																																																																																		
Standard (HWX4)																																																																																																																																																																																																				
4	153mm	6"																																																																																																																																																																																																		
Available on request																																																																																																																																																																																																				
H	102mm	4"																																																																																																																																																																																																		
M	229mm	9"																																																																																																																																																																																																		
5	305mm	12"																																																																																																																																																																																																		

GEFRAN spa reserves the right to make any kind of design or functional modification at any moment without prior notice.

GEFRAN

GEFRAN spa
 via Sebina, 74
 25050 PROVAGLIO D'ISEO (BS) - ITALIA
 tel. 0309888.1 - fax. 0309839063
 Internet: <http://www.gefran.com>

DTS_HWX_Ex_03-2025_ENG