

GEFRAN

QE2008-W SET

SYSTEM FOR STRAIN MEASUREMENT WITH
BLUETOOTH TRANSMISSION



Main features:

- Wireless system for strain measurements with Bluetooth 5.0
- Press-on strain gauge technology (quick and non-destructive mounting)
- Easy mounting via magnetic holding on flat and round surfaces (diameter $\geq 45\text{mm}$)
- Visualization of the measurements via the "Sensormate App" (available for Windows, Android and iOS)
- High performance amplifier integrated in each sensor with high resolution and fast sampling rate
- Integrated LiPo battery with long operating time ($> 12\text{h}$)
- Integrated accelerometer for mounting guidance

The magnetically mounted wireless strain sensor QE2008-W measures the strain directly at the location where it is mounted, providing a measurement that has the same quality and performances as with bonded strain gauges. The Sensormate press-on technology implements a strain gauge positioned under a stainless protective film. When the sensor is mounted on a metallic object, the magnets hold so strictly that frictional contact occurs and allows a reliable measurement.

The mounting of the sensor is quick, simple and non-destructive, allowing for an easy setup and increasing the daily productivity.

The integrated electronics contains a state-of-the-art processing component, which allows hi-end measurements and wireless communication via the Bluetooth 5.0 protocol. The adopted components allow for a low-energy operation, extending the battery life to several working hours.

An on-board accelerometer allows the user to check the correct mounting of the sensor and assure an accurate measurement result. The internal RAM memory helps when a fast measurement is needed, allowing to store high resolution data.

Typical Applications:

- *Injection-moulding machines*
 - Tie Bar parallelism check
 - Bending analysis
 - Cavity pressure profile inspection
 - Tie bar cracks detection
- *Die casting machines*
- *Presses*
- *Structural monitoring*
- *Indirect load and force measurement*


*Please check the user manual for the typical applications and mounting instructions.
(www.gefran.com) (instead of hyperlink)*

TECHNICAL DATA SENSOR

Measuring range	$\pm 800\mu\epsilon$
Output signal for radio transmission	Bluetooth 5.0
Signal range	Bluetooth specification: >100m
Resolution	$0.1\mu\epsilon$
Accuracy	$< \pm 0.5\% \text{ FS}$
Linearity	$< \pm 0.5\% \text{ FS}$
Repeatability	$< 0.2\% \text{ FS}$
On board power supply	Integrated LiPo battery 3.7V 330mAh.
Charging specification	5V, 175mA
Temperature at charging	0...45 °C
Operation temperature	-20 ...65 °C
Storage temperature	-20...45 °C (0 ... 30 °C recommended in case of storage for more than 3months)
Overload capability	unlimited
Type of protection	IP40
Material: Housing	Aluminium
Material: Cover	Plastic
Weight	460g

DIMENSIONS SENSOR

QE2008-W

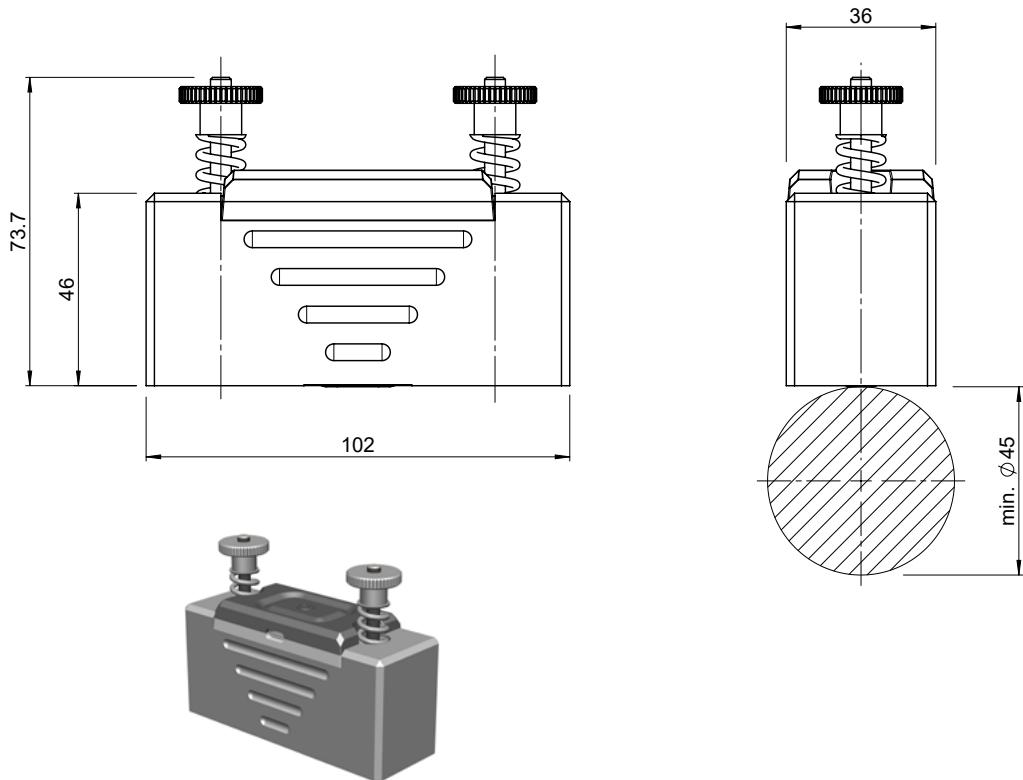

Dimensions in mm

TECHNICAL DATA WIRELESS PROTOCOL

Frequency	2.4000-2.4835 GHz (ISM-Band)
Protocol transceiver to end device	Bluetooth 5 (low energy)
End device compatibility	Sensormate App: – Windows 10 or newer – Android 6.0 or newer – IOS 8.0 or newer
TX-power	8dBm
Range	Bluetooth 5, theoretical up to 300m (Typ. 30 m) "

SYSTEM CONTENT

QE2008-W-SET


Content

- Magnetically mounted wireless sensors QE2008-W
- Charging station, USB-C cable (1 m) and USB wall adapter
- Carrying case with inserts, manual



External dimensions of carrying case	340 x 280 x 130 mm
Weight approx.	ca. 5.3 kg (8 sensor system)

Sensors in case with charging station

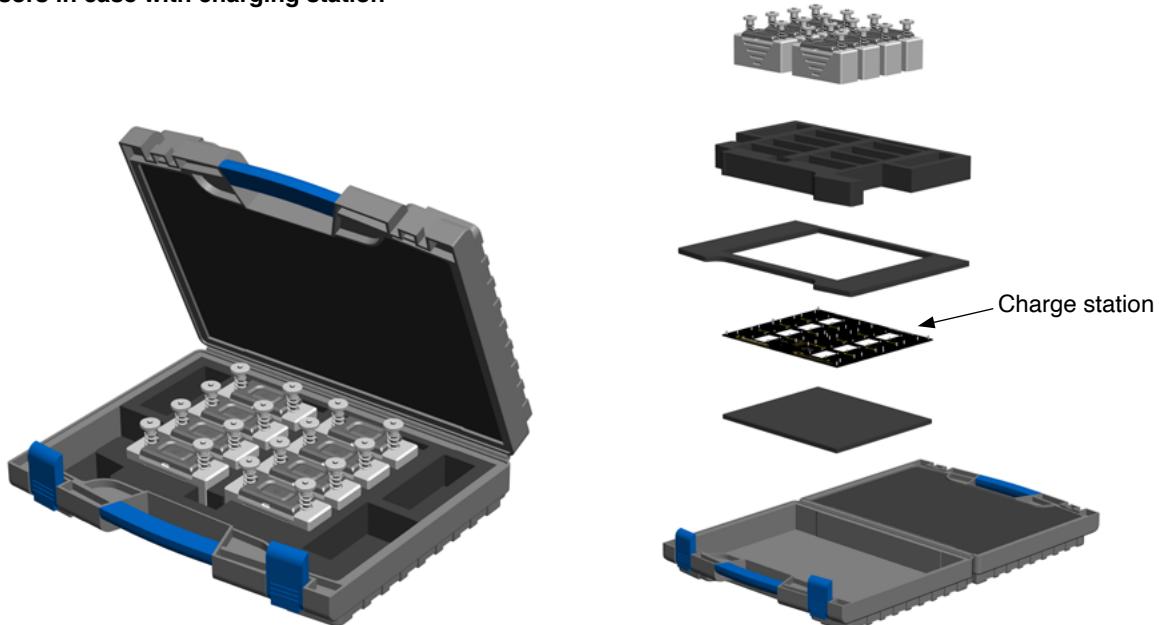

ORDER CODE

Magnet mount strain sensor
complete system

QE2008

- - -

Connection	
Wireless	W

Number of sensors	
2 pieces	02
8 pieces	08
9 pieces	09
10 pieces	10

Example: QE2008-W-08-OOO
Magnet-mount strain sensor QE2008, wireless, number of sensors = 8 pieces

ADDITIONAL ACCESSORIES

Description	Order code	Code
Magnet-mount strain sensor	QE2008-W	F089015
USB-C power supply kit		F092416

GEFRAN spa reserves the right to make any kind of design or functional modification at any moment without prior notice.

GEFRAN

GEFRAN spa
via Sebina, 74 - 25050 Provaglio d'Iseo
(BS) - ITALIEN
Tel.: +39 030 9888.1 - Fax: +39 030 9839063
Internet: www.gefran.com

Gefran Schweiz AG
Steigweg 8, - CH-8355 Aadorf, Schweiz
Tel.: +41 52 523 25 00
Fax: +41(0)52-3661884
Internet: www.gefran.com

DTS_QE2008-W SET_06-2025_ENG