


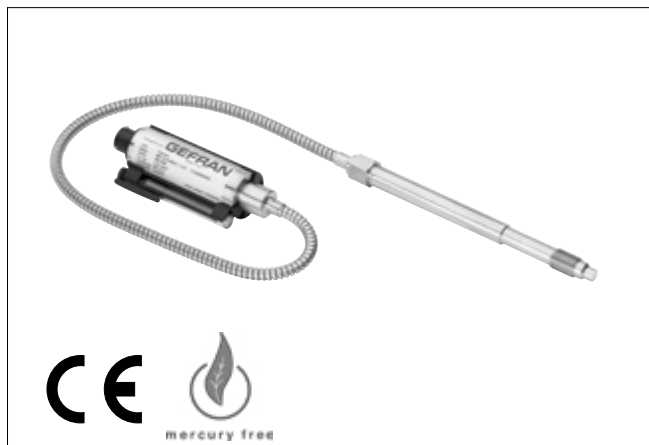

The W7 Performance Level 'c' series of GEFRA, are pressure transmitters for using in High temperature environment.

The main characteristic of this series is the capability to read temperature of the media up to 315°C.

The constructive principle is based on the hydraulic transmission of the pressure.

The fluid-filled system assures the temperature stability. The physical measure is transformed in a electrical measure by means of thick film on stainless steel technology.

MAIN FEATURES

- Pressure ranges from:
0-17 to 0-1000 bar / 0-250 to 0-15000 psi
- Accuracy: $< \pm 0.25\%$ FSO (H); $< \pm 0.5\%$ FSO (M)
- Fluid-filled system for temperature stability
- Oil filling meets FDA requirements CFR 178.3620 and CFR 172.878
- Oil filling volume:
W70 (30mm³); W71, W72, W73 (40mm³)
- 1/2-20UNF, M18x1.5 standard threads; other types available on request
- Other diaphragms available on request
- Autozero function on board / external option
- 17-7 PH corrugated diaphragm with GTP+ coating

GTP+ (advanced protection)

Coating with high resistance against corrosion, abrasion and high temperature

AUTOZERO FUNCTION

All signal variations in the absence of pressure can be eliminated by using the Autozero function.

This function is activated by closing a magnetic contact located on the transmitter housing.

The procedure is permitted only with pressure at zero.


TECHNICAL SPECIFICATIONS

Accuracy (1)	H $< \pm 0.25\%$ FSO (100...1000 bar) M $< \pm 0.5\%$ FSO (17...1000 bar)
Resolution	16 bit
Measurement range	0..17 a 0..1000bar 0..250 a 0..15000psi
Maximum overpressure (without degrading performances)	2 x FS 1.5 x FS above 500bar/7500psi
Measurement principle	Extensimetric
Power supply	18...30Vdc
Maximum current absorption	15mA
Output signal Full Scale (FSO)	10,5Vdc
Zero balance (tolerance $\pm 0.25\%$ FSO)	0,5Vdc
Response time (10...90% FSO)	8ms
Output noise (RMS 10-400Hz)	$< 0.025\%$ FSO
Calibration signal	80% FSO
Power supply polarity reverse protection	YES
Compensated temperature range housing	0...+85°C
Operating temperature range housing	-30...+85°C
Storage temperature range housing	-40...+125°C
Thermal drift in compensated range: Zero / Calibration / Sensibility	$< 0.02\%$ FSO/°C
Diaphragm maximum temperature	315°C/600°F
Zero drift due to change in process temperature (zero)	< 0.04 bar/°C
Standard Material in contact with process medium	Diaphragm: • 17-7 PH corrugated diaphragm with GTP+ Stem: • 17-4 PH
Thermocouple (model W72)	STD : type "J" (isolated junction)
Protection degree (with 6-pole female connector)	IP65


FSO = Full scale output - (1) BFSL method (Best Fit Straight Line): includes combined effects of Non-Linearity, Hysteresis and Repeatability.

MECHANICAL DIMENSIONS

W70

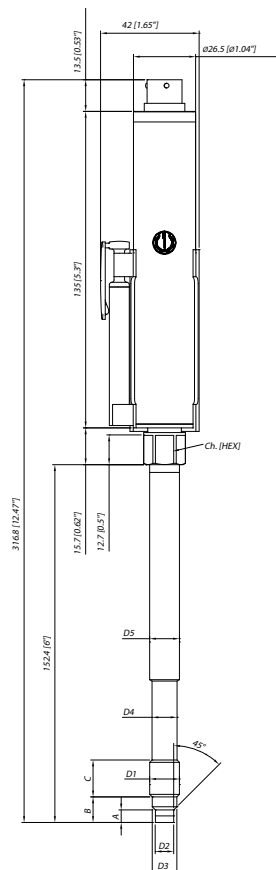


W71

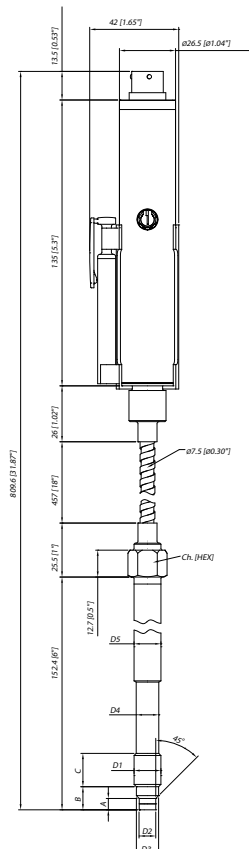


D1	1/2 - 20UNF
D2	$\phi 7.8 \text{ } ^{-0.05}$ [$\phi 0.31 \text{ } ^{-0.002}$]
D3	$\phi 10.5 \text{ } ^{-0.025}$ [$\phi 0.41 \text{ } ^{-0.001}$]
D4	$\phi 10.67$ [$\phi 0.42 \text{ } ^{\circ}$]
D5	$\phi 12.7$ [$\phi 0.5 \text{ } ^{\circ}$]
A	$5.56 \text{ } ^{-0.26}$ [$0.22 \text{ } ^{-0.01}$]
B	11.2 [$0.44 \text{ } ^{\circ}$]
C	15.74 [$0.62 \text{ } ^{\circ}$]
Ch [Hex]	16 [$5/8 \text{ } ^{\circ}$]

D1	M18x1.5
D2	$\varnothing 10$ -0.05 [$\varnothing 0.394''$ -0.002]
D3	$\varnothing 16$ -0.08 [$\varnothing 0.63''$ -0.003]
D4	$\varnothing 16$ -0.4 [$\varnothing 0.63''$ -0.016]
D5	$\varnothing 18$ [$\varnothing 0.71''$]
A	6 -0.26 [$0.24''$ -0.01]
B	14.8 -0.4 [$0.58''$ -0.016]
C	19 [$0.75''$]
Ch [Hex]	19 [$3/4''$]

W72

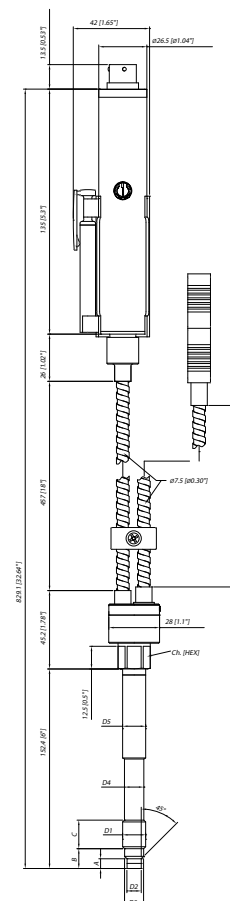

W73

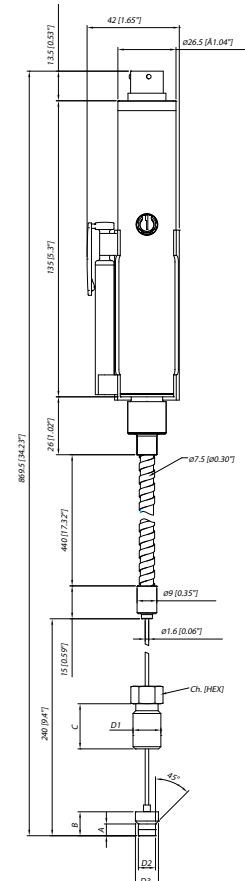

NOTE : dimensions refer to rigid stem length option "4" (153 mm – 6")

WARNING : For installation use a maximum tightening torque of 56 Nm(500 in-lb)

SELF DIAGNOSTICS

Below the conditions detected by the sensor self-diagnostics:

- Cut cable / device non connected / broken power supply, output <0.25V
- Pin detachment, output >11.125V
- Pressure above 200% of the span, output <11.125V
- Voltage monitor in case of overvoltage/undervoltage/ voltage variation in the electronics, output <0.25V
- Program sequence error, output <0.25V
- Overtemperature on the electronics, output <0.25V
- Error on the primary element output or on the first amplification stage, output <0.25V

OPTIONAL RELAY OUTPUT FOR EXCESS PRESSURE PROTECTION

Safety relay characteristics:

- Activation threshold to be defined in the order code
- Rated carry current: 1A
- Rated voltage: 24Vdc $\pm$ 20%
- Switch accuracy: 2 x sensor accuracy
- Hysteresis: 2% FSO

SUPPLY	OUTPUT	RELAY STATUS
OFF	-	OPEN
ON	< X%fs	CLOSED
ON	> X%fs	OPEN
ON	output < 0.25V	OPEN
ON	output > 11.125V	OPEN

NAMUR COMPLIANCE

The sensors are tested according to Namur NE21 recommendations.

The same compatibility is valid for the NE43 Namur recommendation with the following sensor behaviour in case of breakdown:

- Cut cable: breakdown information as the signal is <0.25V
- Device not connected: breakdown information as the signal is <0.25V
- Broken power-supply: breakdown information as the signal is <0.25V

or in case of performance problems:


- most common failures on primary sensors: the signal goes to >11.125V

Note: in all the remaining situations, the output signal is always included between 0.25V and 11.125V.



Recommendation: the error level set by the customer (e.g. maximum pressure value) has to be inside the nominal range

AUTOZERO FUNCTION

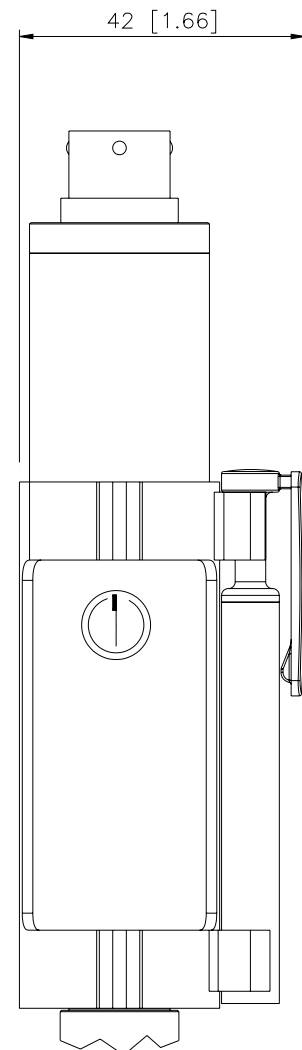


The Autozero function is activated through a magnetic contact (external magnet supplied with the sensor).


See the manual for a complete Autozero function explanation.

ELECTRICAL CONNECTIONS


VOLTAGE OUTPUT

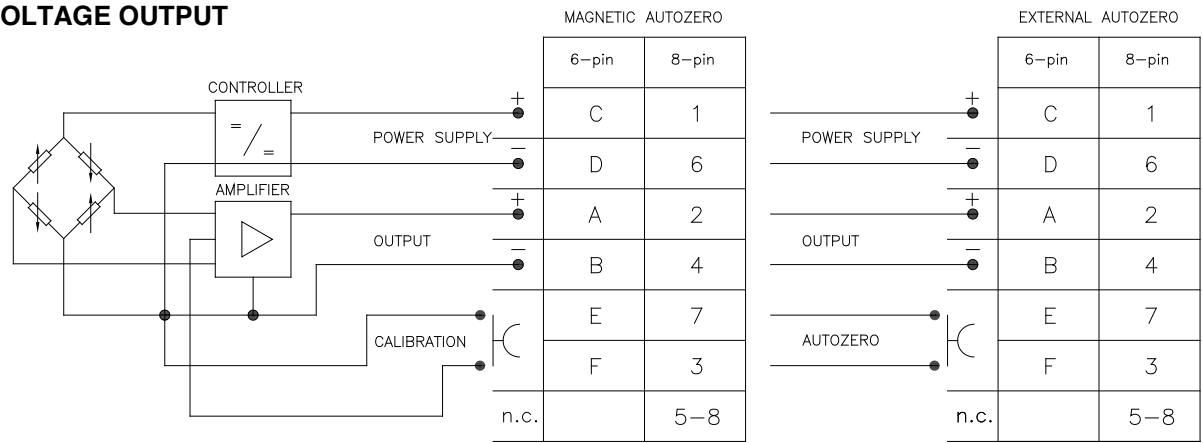


RELAY OUTPUT

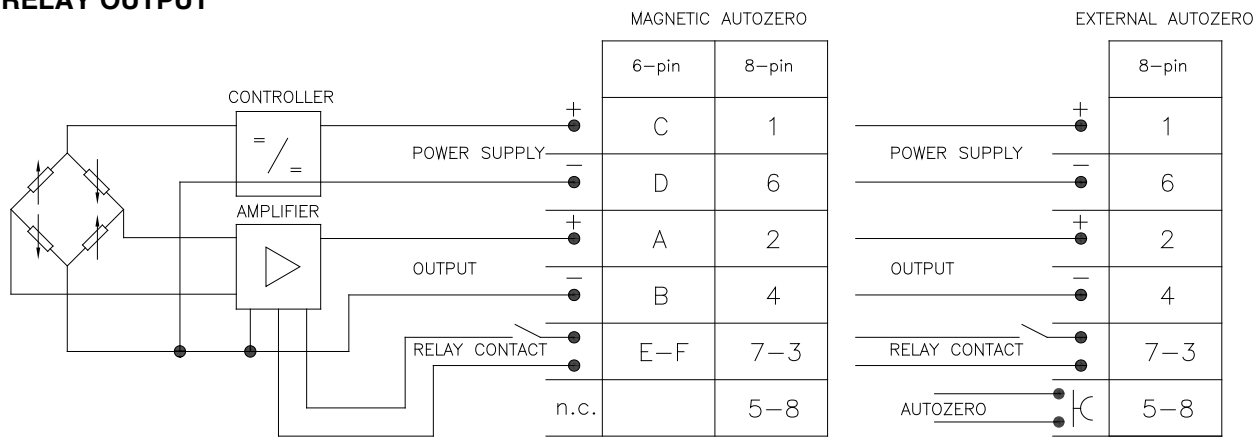

6 pin connector VPT07RA10-6PT2
(PT02A-10-6P)



8 pin connector (Binder)
M16 DIN/EN45326 (09-0173-00-08)



ACCESSORIES

Connectors

6-pin female connector (IP65 protection degree)
8-pin female connector (IP65 protection degree)

Extension cables

6-pin connector with 8m (25ft) cable
6-pin connector with 15m (50ft) cable
6-pin connector with 25m (75ft) cable
6-pin connector with 30m (100ft) cable
8-pin connector with 8m (25ft) cable
8-pin connector with 15m (50ft) cable
8-pin connector with 25m (75ft) cable
8-pin connector with 30m (100ft) cable

CON300
CON027

C08WLS
C15WLS
C25WLS
C30WLS
C08WLS8
C15WLS8
C25WLS8
C30WLS8

Accessories

Mounting bracket
Dummy plug for 1/2-20UNF
Dummy plug for M18x1.5
Drill kit for 1/2-20UNF
Drill kit for M18x1.5
Cleaning kit for 1/2-20UNF
Cleaning kit for M18x1.5
Fixing pen clip
Autozero pen

Thermocouple for W72 model
Type "J" (153mm - 6" rigid rod)

SF18
SC12
SC18
KF12
KF18
CT12
CT18
PKIT 379
PKIT 378

TTER 601

Cable color code	
Conn.	Wire
A-2	Red
B-4	Black
C-1	White
D-6	Green
E-7	Blue
F-3	Orange
5	Grey
8	Pink

ORDER CODE

OUTPUT SIGNAL <table border="1" style="width: 100%;"> <tr> <td>0.5 ... 10.5Vdc</td> <td>7</td> </tr> </table> VERSION <table border="1" style="width: 100%;"> <tr> <td>Rigid stem</td> <td>0</td> </tr> <tr> <td>Rigid stem + flexible</td> <td>1</td> </tr> <tr> <td>With thermocouple</td> <td>2</td> </tr> <tr> <td>Exposed capillary</td> <td>3</td> </tr> </table> CONNECTOR <table border="1" style="width: 100%;"> <tr> <td>6 pin</td> <td>6</td> </tr> <tr> <td>8 pin</td> <td>8</td> </tr> </table> ACCURACY CLASS <table border="1" style="width: 100%;"> <tr> <td>0.25% FSO (ranges ≥ 100 bar/1500 psi)</td> <td>H</td> </tr> <tr> <td>0.5% FSO</td> <td>M</td> </tr> </table> MEASUREMENT RANGE <table border="1" style="width: 100%;"> <thead> <tr> <th colspan="2">bar</th> <th colspan="2">psi</th> </tr> </thead> <tbody> <tr> <td>17</td> <td>B17U</td> <td>250</td> <td>P25D</td> </tr> <tr> <td>35</td> <td>B35U</td> <td>500</td> <td>P05C</td> </tr> <tr> <td>50</td> <td>B05D</td> <td>750</td> <td>P75D</td> </tr> <tr> <td>70</td> <td>B07D</td> <td>1000</td> <td>P01M</td> </tr> <tr> <td>100</td> <td>B01C</td> <td>1500</td> <td>P15C</td> </tr> <tr> <td>200</td> <td>B02C</td> <td>3000</td> <td>P03M</td> </tr> <tr> <td>350</td> <td>B35D</td> <td>5000</td> <td>P05M</td> </tr> <tr> <td>500</td> <td>B05C</td> <td>7500</td> <td>P75C</td> </tr> <tr> <td>700</td> <td>B07C</td> <td>10000</td> <td>P10M</td> </tr> <tr> <td>1000</td> <td>B01M</td> <td>15000</td> <td>P15M</td> </tr> </tbody> </table> THREAD <table border="1" style="width: 100%;"> <tr> <td colspan="2">Standard</td> </tr> <tr> <td>1/2 - 20 UNF</td> <td>1</td> </tr> <tr> <td>M18 x 1.5</td> <td>4</td> </tr> </table>	0.5 ... 10.5Vdc	7	Rigid stem	0	Rigid stem + flexible	1	With thermocouple	2	Exposed capillary	3	6 pin	6	8 pin	8	0.25% FSO (ranges ≥ 100 bar/1500 psi)	H	0.5% FSO	M	bar		psi		17	B17U	250	P25D	35	B35U	500	P05C	50	B05D	750	P75D	70	B07D	1000	P01M	100	B01C	1500	P15C	200	B02C	3000	P03M	350	B35D	5000	P05M	500	B05C	7500	P75C	700	B07C	10000	P10M	1000	B01M	15000	P15M	Standard		1/2 - 20 UNF	1	M18 x 1.5	4	W - - - - - <table border="1" style="width: 100%;"> <tr> <td>0000</td> <td>X</td> <td>000</td> <td>X</td> <td>00</td> </tr> </table> Output Relay Version (activation threshold): X=no relay B=80%fs A=70%fs C=90%fs 000= Special executions <table border="1" style="width: 100%;"> <tr> <td>E</td> <td>External autozero (*)</td> </tr> <tr> <td>-</td> <td>Magnetic autozero</td> </tr> </table> (*) as an alternative to the CAL function <table border="1" style="width: 100%;"> <tr> <td>P</td> <td>Performance Level='c'</td> </tr> </table> FLEXIBLE ROD LENGTH (mm/inches) (*) <table border="1" style="width: 100%;"> <tr> <td colspan="2">Standard (W70)</td> </tr> <tr> <td>0</td> <td>none</td> </tr> <tr> <td colspan="2">Standard (W71,W72)</td> </tr> <tr> <td>D</td> <td>457mm 18"</td> </tr> <tr> <td>E</td> <td>610mm 24"</td> </tr> <tr> <td>F</td> <td>760mm 30"</td> </tr> <tr> <td colspan="2">Standard (W73)</td> </tr> <tr> <td>L</td> <td>711mm 28"</td> </tr> <tr> <td colspan="2">Available on request</td> </tr> <tr> <td>A</td> <td>76mm 3"</td> </tr> <tr> <td>B</td> <td>152mm 6"</td> </tr> <tr> <td>C</td> <td>300mm 12"</td> </tr> </table> (*) max combined stem/flexible length is 914mm - 36" RIGID ROD LENGTH (mm/inches) (*) <table border="1" style="width: 100%;"> <tr> <td colspan="2">Standard (W70, W71, W72)</td> </tr> <tr> <td>4</td> <td>153mm 6"</td> </tr> <tr> <td>5</td> <td>318mm 12.5"</td> </tr> <tr> <td colspan="2">Standard (W73)</td> </tr> <tr> <td>0</td> <td>none</td> </tr> <tr> <td colspan="2">Available on request</td> </tr> <tr> <td>1</td> <td>38mm 1.5"</td> </tr> <tr> <td>2</td> <td>50mm 2"</td> </tr> <tr> <td>3</td> <td>76mm 3"</td> </tr> <tr> <td>6</td> <td>350mm 14"</td> </tr> <tr> <td>7</td> <td>400mm 16"</td> </tr> <tr> <td>8</td> <td>456mm 18"</td> </tr> </table> (*) Different lengths available, consult Factory	0000	X	000	X	00	E	External autozero (*)	-	Magnetic autozero	P	Performance Level='c'	Standard (W70)		0	none	Standard (W71,W72)		D	457mm 18"	E	610mm 24"	F	760mm 30"	Standard (W73)		L	711mm 28"	Available on request		A	76mm 3"	B	152mm 6"	C	300mm 12"	Standard (W70, W71, W72)		4	153mm 6"	5	318mm 12.5"	Standard (W73)		0	none	Available on request		1	38mm 1.5"	2	50mm 2"	3	76mm 3"	6	350mm 14"	7	400mm 16"	8	456mm 18"
0.5 ... 10.5Vdc	7																																																																																																																															
Rigid stem	0																																																																																																																															
Rigid stem + flexible	1																																																																																																																															
With thermocouple	2																																																																																																																															
Exposed capillary	3																																																																																																																															
6 pin	6																																																																																																																															
8 pin	8																																																																																																																															
0.25% FSO (ranges ≥ 100 bar/1500 psi)	H																																																																																																																															
0.5% FSO	M																																																																																																																															
bar		psi																																																																																																																														
17	B17U	250	P25D																																																																																																																													
35	B35U	500	P05C																																																																																																																													
50	B05D	750	P75D																																																																																																																													
70	B07D	1000	P01M																																																																																																																													
100	B01C	1500	P15C																																																																																																																													
200	B02C	3000	P03M																																																																																																																													
350	B35D	5000	P05M																																																																																																																													
500	B05C	7500	P75C																																																																																																																													
700	B07C	10000	P10M																																																																																																																													
1000	B01M	15000	P15M																																																																																																																													
Standard																																																																																																																																
1/2 - 20 UNF	1																																																																																																																															
M18 x 1.5	4																																																																																																																															
0000	X	000	X	00																																																																																																																												
E	External autozero (*)																																																																																																																															
-	Magnetic autozero																																																																																																																															
P	Performance Level='c'																																																																																																																															
Standard (W70)																																																																																																																																
0	none																																																																																																																															
Standard (W71,W72)																																																																																																																																
D	457mm 18"																																																																																																																															
E	610mm 24"																																																																																																																															
F	760mm 30"																																																																																																																															
Standard (W73)																																																																																																																																
L	711mm 28"																																																																																																																															
Available on request																																																																																																																																
A	76mm 3"																																																																																																																															
B	152mm 6"																																																																																																																															
C	300mm 12"																																																																																																																															
Standard (W70, W71, W72)																																																																																																																																
4	153mm 6"																																																																																																																															
5	318mm 12.5"																																																																																																																															
Standard (W73)																																																																																																																																
0	none																																																																																																																															
Available on request																																																																																																																																
1	38mm 1.5"																																																																																																																															
2	50mm 2"																																																																																																																															
3	76mm 3"																																																																																																																															
6	350mm 14"																																																																																																																															
7	400mm 16"																																																																																																																															
8	456mm 18"																																																																																																																															

Example

W71-6-M-B07C-1-4-D-P

Melt pressure transmitter, 0.5...10.5Vdc output, 6-pin connector, 1/2-20UNF thread, 700 bar full scale, 0.5% accuracy class, 153 mm (6") rigid stem, 457mm (18") flexible capillary; Performance Level='c'

Sensors are manufactured in compliance with:

- EMC directive
- RoHS directive
- Machinery directive

Electrical installation requirements and Conformity certificate are available on our web site: www.gefran.com

GEFRAN reserves the right to make any kind of design or functional modification at any moment without prior notice

GEFRAN

GEFRAN spa
via Sebina, 74
25050 PROVAGLIO D'ISEO (BS) - ITALIA
tel. 0309888.1 - fax. 0309839063
Internet: <http://www.gefran.com>

DTS_W7-PLc_04-2019_ENG