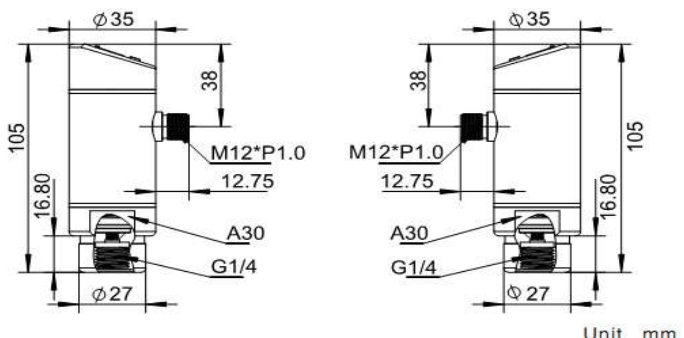
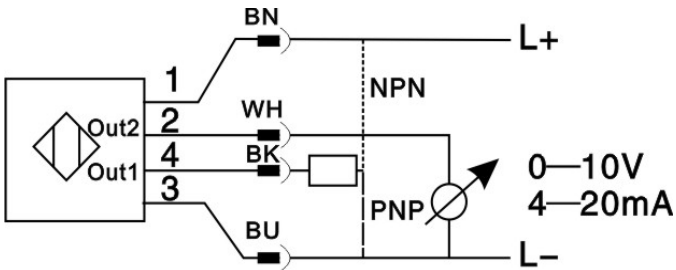


PA4103	
Stainless steel Micro-Pressure Sensor	
M12 socket	
Connection: Internal thread G1/4	
Programmable	
Switching + Analogue output	
3 digit display	
Sensing range	
-100...500 mbar	
-1.45...7.25 Psi	
-0.1...0.5 kgf/cm ²	
	 
Applications	Negative pressure: corresponding pressure
	Liquid and gas
Electric design	DC PNP / NPN
Output	NO  / NC  programmable, 4...20mA or 0...10V
Supply voltage[V]	18...36DC
Short-circuit protection	Pulsed
Reverse polarity protection	Yes
Overload protection	Yes
Watchdog	Yes
Voltage drop[V]	<2
Current consumption[mA]	<60
Overloading Pressure [bar]	1.0
Burst pressure [bar]	1.3
Analogue output OUT2	4...20 mA / 0...10V
Overload of analogue output[Ohm]	4...20 mA:Max. (U _b -10V) x 50 / 0...10V:Min. 2000
Switching output OUT1	NPN/PNP
Overload of switching output [mA]	300
Setting range	
Switching point (SP)	-0.98...1bar
Reset point (rP)	-0.99...0.99bar
In steps of	0.01bar
Programming options	Hysteresis range / Window function; NO / NC; Calibration; Unit display; Output 2 setting: Current / Voltage output; Output 1 setting: NPN / PNP output
Deviations (% of final value measured)	
Accuracy of switching point	< ±0.5
Characteristic deviation	< ±0.5

Hysteresis	< ± 0.25
Stability of long-time use	< ± 0.5
Ambient temperature [$^{\circ}\text{C}/^{\circ}\text{F}$]	-25...80/-13...176
Medium temperature [$^{\circ}\text{C}/^{\circ}\text{F}$]	-25...80/-13...176
Storage temperature [$^{\circ}\text{C}/^{\circ}\text{F}$]	-40...100/-40...212
Protection/Enclosure Rating	IP68
Insulation resistance[M Ω]	> 100(500 V DC)
Dimension	
ESD[KV]	III
EFT[KV]	III
Walkie talkie experiment[M]	<10
Shock resistance[g]	50
Vibration resistance[g]	20
Housing material	Stainless steel 304
Probe material/Wetted Parts	Stainless steel 316L
Medium contacting material	Ceramic/S316L/FPM (Viton)
Function Display	
Switching status LED	2 red LED
System pressure, function LED	3 digit segment
Connection	M12 socket
Wiring	
Core color	