
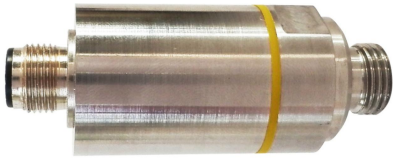
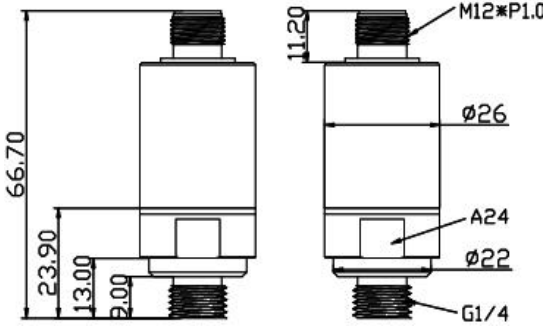
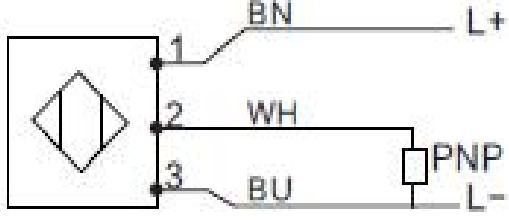


PC2142 Compact Pressure Sensor M12 socket Connection: External thread G1/4 Switching output Sensing range 0...5bar 0...73Psi 0...5 kgf/cm2	 CE RoHS
Applications	Pressure: corresponding pressure
	Liquid and gas
Supply voltage[V]	18...36DC
Reverse polarity protection	Yes
Voltage drop[V]	<2
Current consumption[mA]	<30
Overloading Pressure[bar]	10
Burst pressure[bar]	20
Switching output	PNP NO/NC
Overload of switching output[mA]	300
Consumption	0.72W Max
Final value measured[%]	< ±1
Output response time[ms]	3
Ambient temperature [°C/°F]	-25...80/-13...176
Medium temperature [°C/°F]	-25...80/-13...176
Storage temperature[°C/°F]	-40...100/-40...212
Protection/Enclosure Rating	IP68
Insulation resistance[MΩ]	> 100(500 V DC)
Dimensions[mm]	 66.70 23.90 13.00 2.00 11.20 M12*P1.0 ø26 A24 ø22 G1/4
ESD EN61000-4-2	4kV (Level 2)
EFT EN61000-4-4	2kV (Level 3)
Shock resistance[g]	50
Vibration resistance[g]	20
Housing material	Stainless steel 304

Probe material/Wetted Parts	V2A(1.4305);Ceramic;FPM (Viton); Probe: Stainless steel 316L
Connection	M12 socket
Wiring Core color	 

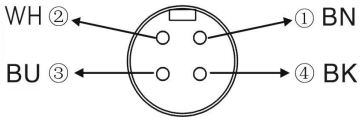

Akdeniz Mekatronik San.Tic.Ltd.Şti
 Yeşiloba Mahallesi 46290 Sk. No:4 Adana/Türkiye
 Tel. +90 322 428 11 44
 E-mail: info@akdenizmekatronik.com.tr