
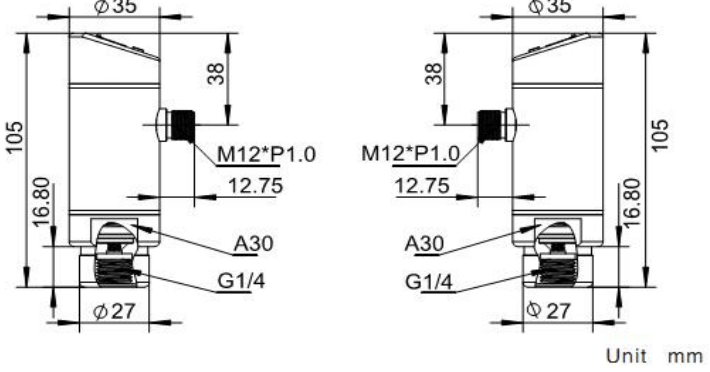


PE4103 Ex-Proof mbar Pressure Sensor M12 socket Connection: Internal thread G1/4" Programmable Switching + Analogue output 4 digit display Sensing range -100...500 mbar -1.45...7.25 Psi -0.1...0.5 kgf/cm2	   
Ex-Proof classification	Ex nA IIC T4 Gc / Ex tD A21 IP67 T90°C
Applications	Liquid and Air Used to measure low range/very small value pressure
Electric design	DC PNP / NPN
Output	NO  / NC  programmable, 4...20mA or 0...10V
Supply voltage[V]	20...32DC
Short-circuit protection	Pulsed
Reverse polarity protection	Yes
Overload protection	Yes
Watchdog	Yes
Voltage drop[V]	<2
Current consumption[mA]	<60
Overloading Pressure [bar]	1.0
Burst pressure [bar]	1.3
Analogue output OUT2	4...20 mA / 0...10V
Overload of analogue output[Ohm]	4...20 mA:Max. (Ub-10V) x 50 / 0...10V:Min. 2000
Switching output OUT1	PNP/NPN
Overload of switching output [mA]	300
Setting range	
Switching point (SP)	-100...500 mbar
Reset point (rP)	-100...499 mbar
In steps of	1 mbar
Programming options	Hysteresis range / Window function; NO / NC; Calibration; Unit display; Output 2 setting: Current / Voltage output; Output 1 setting: PNP / NPN output
Deviations (% of final value measured)	
Accuracy of switching point	< ±0.5
Characteristic deviation	< ±0.5
Hysteresis	< ±0.25
Stability of long-time use	< ±0.5
Ambient temperature [°C/°F]	-25...70/-13...158
Medium temperature [°C/°F]	-25...70/-13...158 When used for non-explosive area: -25...80/-13...176
Storage temperature[°C/°F]	-40...100/-40...212
Protection/Enclosure Rating	IP67

Insulation resistance[MΩ]	> 100(500 V DC)
Dimension	
ESD	6kV
EFT	2kV
Walkie talkie experiment[mm]	<10
Shock resistance[g]	50
Vibration resistance[g]	20
Housing material	Stainless steel 304
Probe material/Wetted Parts	Stainless steel 316L
Medium contacting material	Ceramic/Stainless steel 316L/FKM
Function Display	
Switching status LED	2 red LED
System pressure/Function LED	4 digit segment
Connection	M12 socket
Wiring	
Core color	
Installation notice	Use the wrench to tighten Ex-proof connector with 1.5Nm of torque

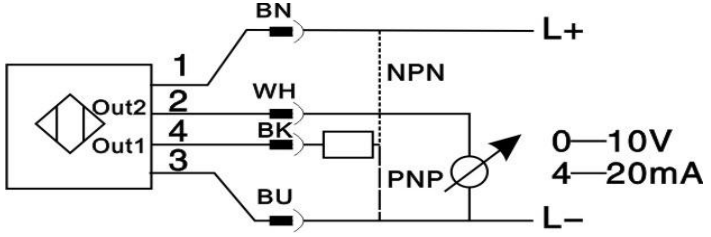

Akdeniz Mekatronik San.Tic.Ltd.Şti
Yeşiloba Mahallesi 46290 Sk. No:4 Adana/Türkiye
Tel. +90 322 428 11 44
E-mail: info@akdenizmekatronik.com.tr