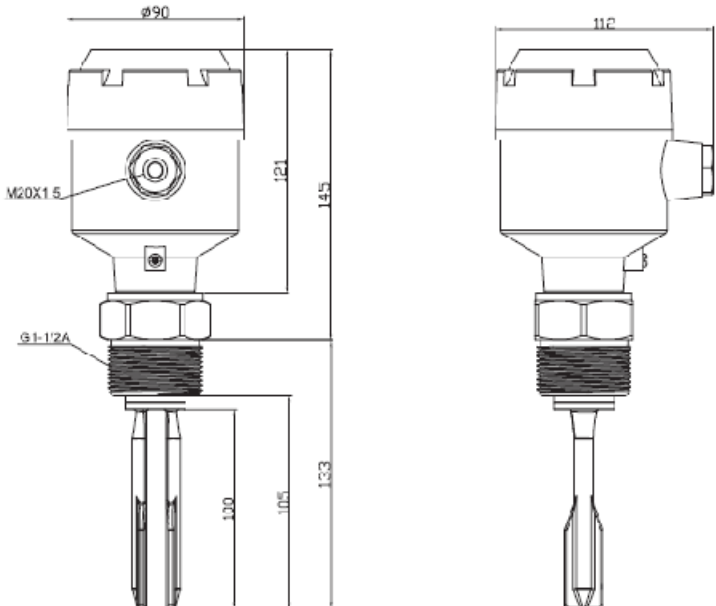
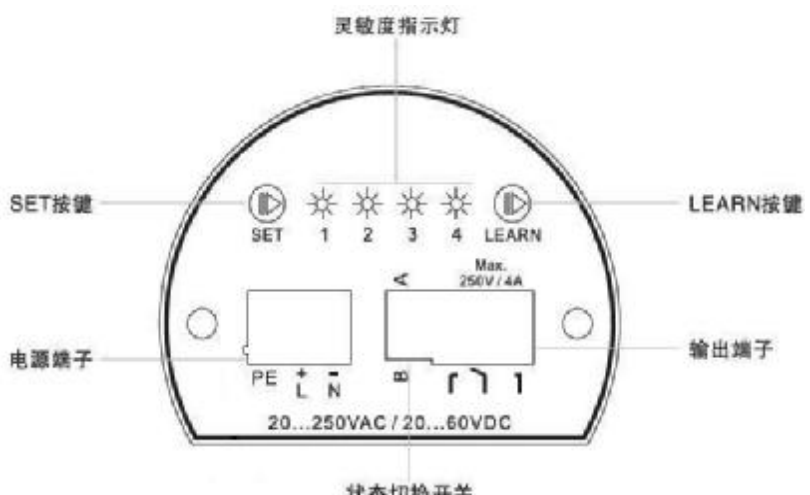



VRE10AA01056 EX proof extension vibrating fork level switch Relay output G1-1/2A thread Flange or insert can be installed Outlet specification: M20*P1.5 Response time: <3s	
Display	4×Red LED
Supply voltage[V]	20...60VDC 20...250VAC 50/60Hz
Vibration frequency[Hz]	300...340
Response time[S]	<3
Max. power consumption[W]	3 (DC power supply)
	15 (AC power supply)
Output	Relay
NPN/PNP Output maximum load[mA]	AC250V/4A, DC60V/4A
Applications	Particle / liquid / powder
Ambient Temperature[°C/°F]	-40...+70
Operating pressure[bar]	-1...40
Connection	G1-1/2"A insert, flange
Probe length[mm]	105
Connection	M20*1.5
Housing material	Aluminium alloy
Probe material/Wetted parts	Stainless steel 316L
Protection	IP65
EMC	ESD 6KV
	EFT 2KV
Dimensions[mm]	

Panel	 灵敏度指示灯 SET按钮 LEARN按钮 电源端子 输出端子 状态切换开关 20...250VAC / 20...60VDC Max. 250V/4A				
Wiring	 PE L N Power supply Signal output Relay输出: <table border="1"> <tr> <td>电源供应</td><td>20-250VAC 50-60Hz 20-60VDC</td></tr> <tr> <td>讯号输出</td><td>4A/250VAC Max. 4A/60VDC Max.</td></tr> </table>	电源供应	20-250VAC 50-60Hz 20-60VDC	讯号输出	4A/250VAC Max. 4A/60VDC Max.
电源供应	20-250VAC 50-60Hz 20-60VDC				
讯号输出	4A/250VAC Max. 4A/60VDC Max.				