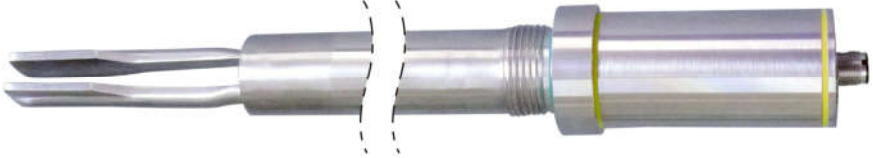
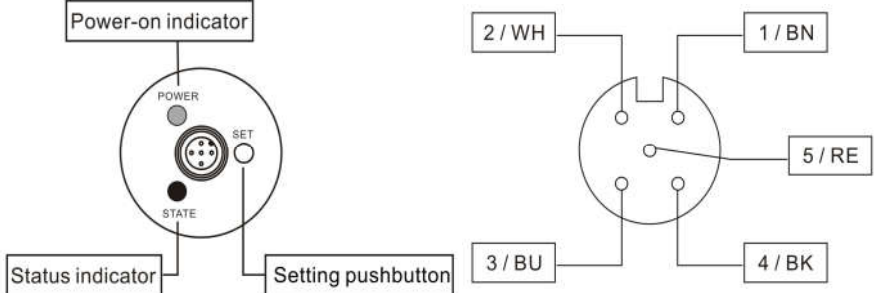


VRM11AA06006 Small Vibrating Fork Level Switches Extended L=600mm RELAY output Smart type G1"A thread M12 socket Suitable for powder,solid or liquid	
Applications	Suitable for powder,solid or liquid through learning function in pipe or tank
Display	Green LED : Power ON/OFF Red LED : Operation
Supply voltage[V]	20~60VDC & 20~250VAC 50~60Hz
Response time[s]	<3
Max. power consumption	DC 3W Max , AC 15W Max
Output	RELAY SPDT 4A/250VAC or 4A/60VDC
NO/NC Setting function	Yes
Learning Mode	Yes
Medium Temperature[°C/°F]	-40...135 (Max 150° C 1h) / -40...275 (Max 302° F 1h)
Ambient Temperature[°C/°F]	-40...85 / -40...185
Operating pressure[bar]	-1...40
Thread connection	G1" A
Probe length[mm]	600
Connection	M12 socket
Housing material	Stainless steel 304L
Probe material/Wetted parts	Stainless steel 316L
Panel and M12 Connection	
EMC	ESD 6KV
	EFT 2KV
	LSG 250V

Protection/Enclosure rating	IP68/IP69K*
Walkie talkie experiment[mm]	< 5
Dimensions[mm]	
Wiring	
Note*	Use sanitary adapter to upgrade to IP69K (Optional accessory)