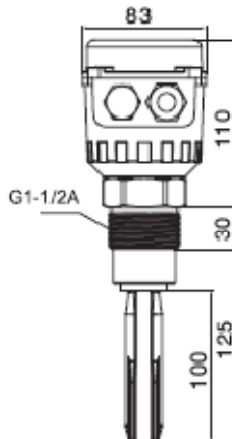
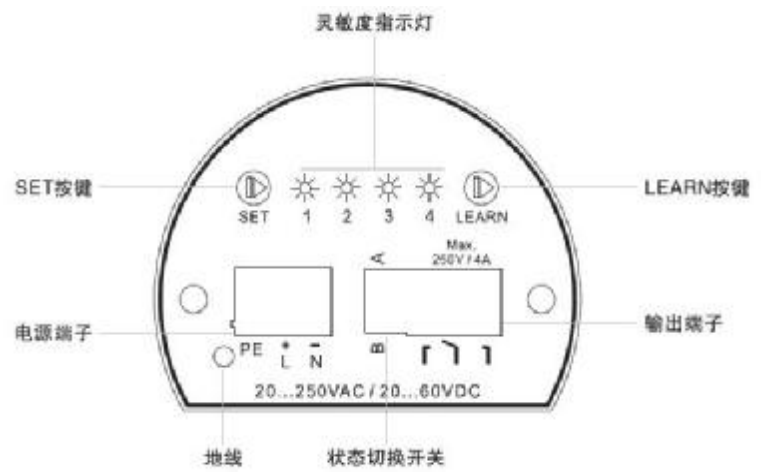



VRT10AB01256 Smart Vibrating Fork Level Switches NPN & PNP output G1-1/2A thread Flange or insert can be installed M20*P1.5 connector response time: <3s	
Display	4×Red LED
Supply voltage[V]	20...60VDC
response time[S]	<3
Max. power consumption[W]	3
Output	NPN & PNP
NPN/PNP output load	400
Applications	powder/solid/liquid
Ambient temperature[°C]	-40...+70
Operating pressure[bar]	-1...40
Connection	G1-1/2"A
Probe length[mm]	125
Electrical interface	M20*1.5
Housing material	Aluminium alloy
Probe material	Stainless steel 316L
Protection	IP65
EMC	ESD 6KV
	EFT 2KV
Dimensions[mm]	

Panel	 灵敏度指示灯 SET按钮 LEARN按钮 电源端子 输出端子 地线 状态切换开关 Max. 250V/4A 20...250VAC / 20...60VDC				
Wiring	 PE Power supply Load NPN PNP NPN/PNP输出: <table border="1"> <tr> <td>电源供应</td> <td>20~60VDC</td> </tr> <tr> <td>讯号输出</td> <td>400mA Max.</td> </tr> </table>	电源供应	20~60VDC	讯号输出	400mA Max.
电源供应	20~60VDC				
讯号输出	400mA Max.				